

XPG

2026 PRODUCT CATALOG





CONTENTS

DRAM	05
SSD	15
PSU	23
PC CHASSIS	39
COOLING SOLUTIONS	53
GAMING GEARS	69
PRIME SOFTWARE	83

XTREME PERFORMANCE GEAR

At XPG, we don't just craft Xtreme Performance Gear for streamers, esports athletes, and tech enthusiasts. We work closely with the community to understand the needs of real users and create products that meet the highest standards of stability, reliability, and performance. Innovation is at the heart of our approach to design and engineering. This commitment has earned XPG several prestigious international distinctions, including iF Design, Red Dot Design, and Good Design awards.

XPG was established in 2008 by ADATA, a world leader in DRAM module manufacturing.



GAME TO THE XTREME

However you play, XPG is with you every step of the way – celebrating your wins and supporting you through every challenge. Because gaming is part of our DNA.



A Legacy of Excellence

XPG has earned widespread acclaim in the gaming industry, amassing an impressive array of prestigious awards that highlight our steadfast commitment to innovation and quality. Celebrated with honors such as the Red Dot, iF Design, and numerous media awards, we consistently exemplify the pinnacle of excellence. Our dedication to advancing gaming technology ensures the delivery of outstanding performance and sophistication to enthusiasts worldwide.

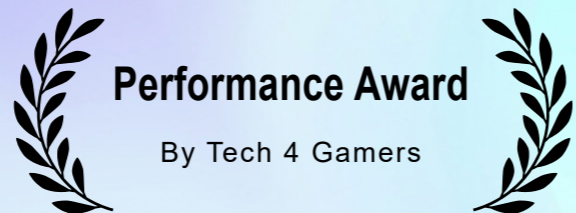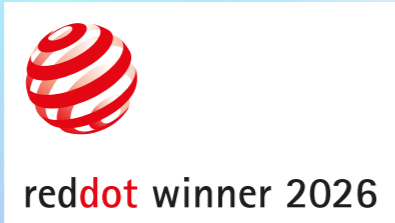

"XPG PRECOG Studio... offers tremendous value... with impressively clean, expansive sound... and great spatial positioning... a great value option for gamers on a budget."








"XPG's Core Reactor II series... offers a balance of performance, quality, and affordability... with efficient thermal management and robust build quality for mid-range builders needing extra power."



"The XPG Fusion Titanium 1600 is a powerhouse, offering exceptional efficiency... for those requiring extreme performance and reliability..."

XPG

DRAM Module

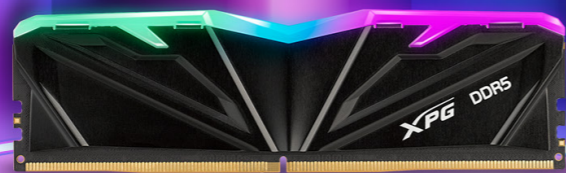
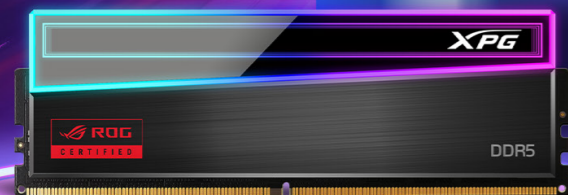
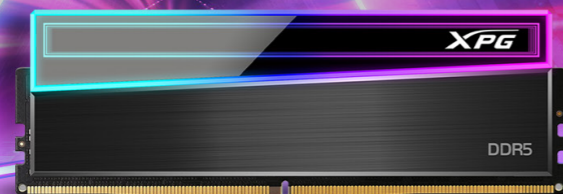


	NOVAKEY RGB DDR5	NOVAKEY RGB ROG CERTIFIED
Memory Type	DDR5	DDR5
Form Factor	U-DIMM	U-DIMM
Color	Black	Black
Capacity	16GB / 32GB	16GB
Speeds	5,600 / 6,000 / 6,400 / 7,200 / 8,000 MT/s	6,200 MT/s
CAS Latencies	30, 32, 34, 38, 46, 48	30
Operating Voltage	1.1V-1.4V	1.4V
Operating Temperature	0°C to 85°C	0°C to 85°C
Dimensions (L x W x H)	133.35 x 45.5 x 8.5mm	133.35 x 45.5 x 8.5mm
Weight	53.23g / 56.12g	53.23g
Warranty	Limited lifetime warranty	



	LANCER RGB DDR5	LANCER DDR5
Memory Type	DDR5	DDR5
Form Factor	U-DIMM	U-DIMM
Color	Black / White	Black / White
Capacity	16GB / 32GB / 48GB	16GB / 32GB
Speeds	6,000 / 6,400 / 7,200 / 8,000MT/s	6,000 / 6,400 MT/s
CAS Latencies	30, 32, 34, 38	30, 32
Operating Voltage	1.35V-1.4V	1.35V-1.4V
Operating Temperature	0°C to 85°C	0°C to 85°C
Dimensions (L x W x H)	133.35 x 43.56 x 8mm	133.35 x 43.56 x 8mm
Weight	72.4g	72.4g
Warranty	Limited lifetime warranty	

	ARMAX RGB DDR5	ARMAX DDR5
Memory Type	DDR5	DDR5
Form Factor	U-DIMM	U-DIMM
Color	Black	Black
Capacity	16GB / 32GB	16GB / 32GB
Speeds	5,600 / 6,000 / 6,400 MT/s	5,600 / 6,000 / 6,400 MT/s
CAS Latencies	30, 32, 36, 46	30, 32, 36, 46
Operating Voltage	1.1V-1.4V	1.1V-1.4V
Operating Temperature	0°C to 85°C	0°C to 85°C
Dimensions (L x W x H)	133.35 x 39.5 x 8.5mm	133.35 x 39.49 x 8.5mm
Weight	43.28g / 46.86g	43.16g / 46.74g
Warranty	Limited lifetime warranty	




	LANCER BLADE RGB DDR5	LANCER BLADE DDR5
Memory Type	DDR5	DDR5
Form Factor	U-DIMM	U-DIMM
Color	Black / White	Black / White
Capacity	8GB / 16GB / 24GB / 32GB	8GB / 16GB / 24GB / 32GB
Speeds	5,600 / 6,000 / 6,400 MT/s	5,600 / 6,000 / 6,400 MT/s
CAS Latencies	28, 30, 32, 36, 46, 48	28, 30, 32, 36, 46, 48
Operating Voltage	1.1V-1.4V	1.1V-1.4V
Operating Temperature	0°C to 85°C	0°C to 85°C
Dimensions (L x W x H)	133.35 x 40 x 7.86mm	133.35 x 39.5 x 8.5mm
Weight	41.11g / 44.41g	72.4g
Warranty	Limited lifetime warranty	

	SPECTRIX D41	GAMMIX D35G	GAMMIX D35
Memory Type	DDR4	DDR4	DDR4
Form Factor	U-DIMM	U-DIMM	U-DIMM
Color	Tungsten Grey	White	Black / White
Capacity	8GB / 16GB	8GB / 16GB / 32GB	8GB / 16GB / 32GB
Speeds	3,200 MT/s	3,200 / 3,600 MT/s	3,200 / 3,600 MT/s
CAS Latencies	16	16, 18	16, 18
Operating Voltage	1.2V - 1.35V	1.35V	1.35V
Operating Temperature	0°C to 85°C	0°C to 85°C	0°C to 85°C
Dimensions (L x W x H)	133.3 x 45.8 x 8mm	133.35 x 36 x 6.6mm	133.35 x 34x 5.9mm
Weight	45g	31.6g / 32.43g / 33.09g	27.34g / 28.41g / 29.27g
Warranty	Limited lifetime warranty		

NOVAKEY RGB DDR5



UNLOCK THE INFINITE POSSIBILITY

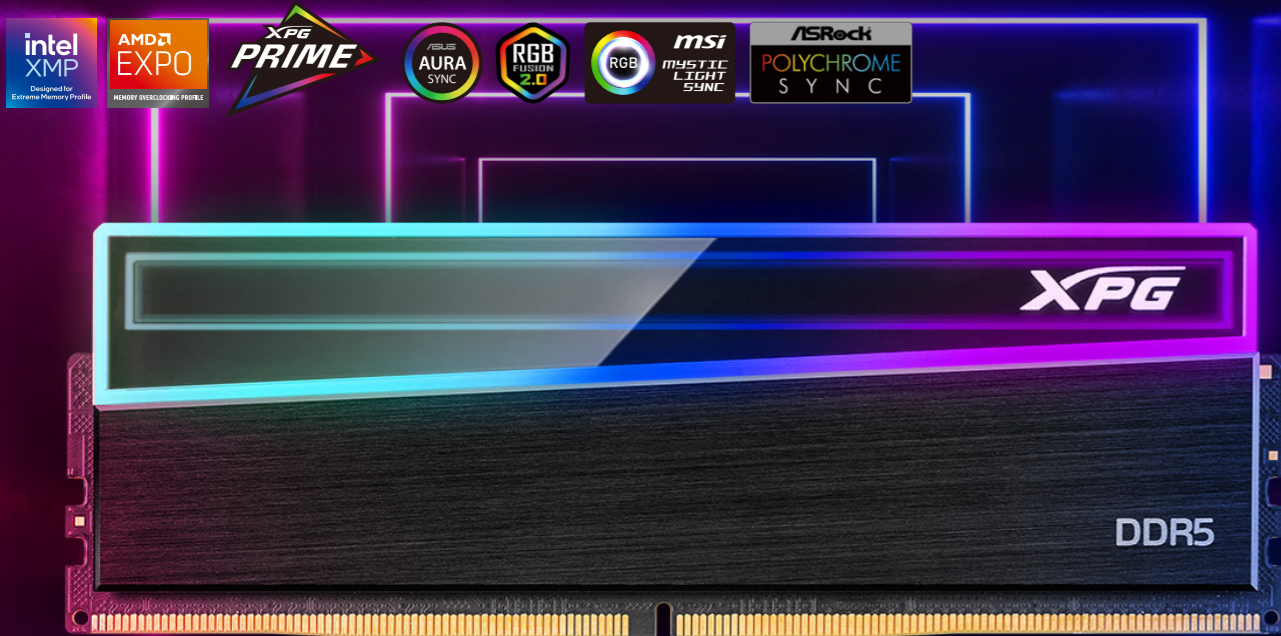


WORLD'S FIRST
INFINITY MIRROR DESIGN

50% RECYCLED ALUMINUM
& 85% PCR PLASTIC

CUSTOMIZABLE
RGB LIGHTING

NOVAKEY RGB DDR5 ROG CERTIFIED

DOMINATE IN EVERY BATTLEFIELD

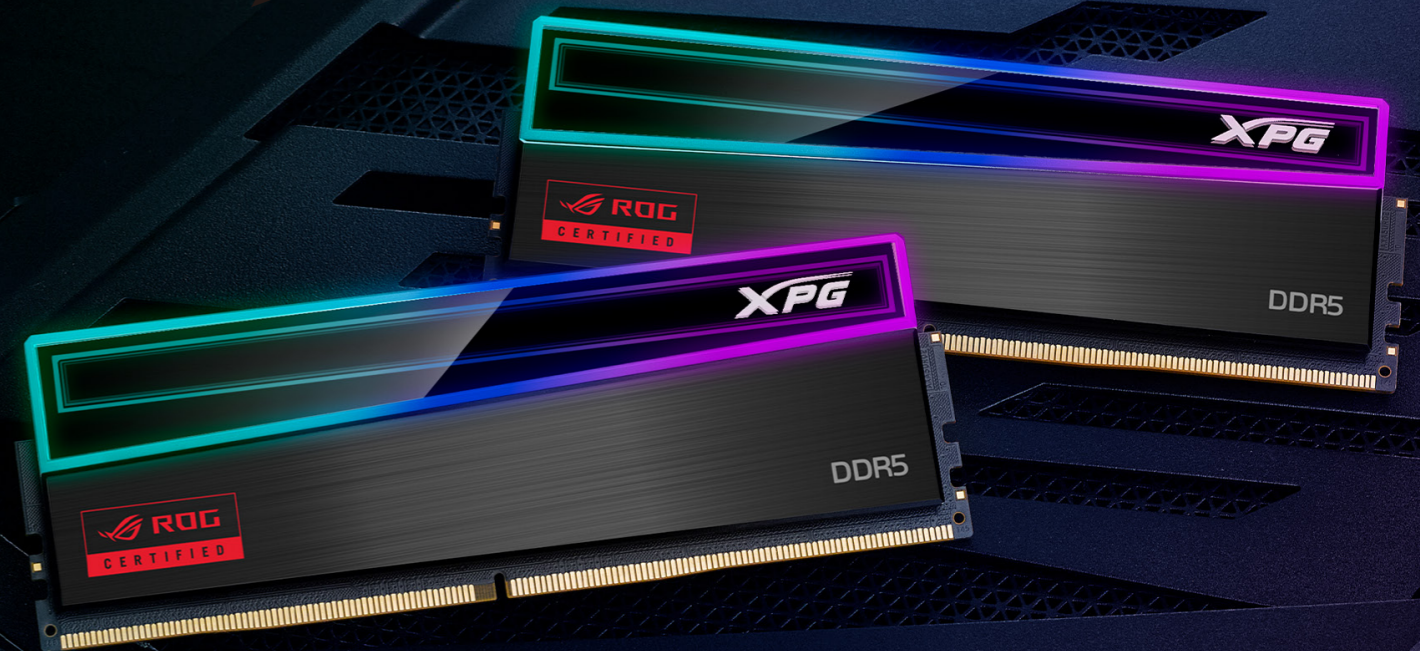

ROG CERTIFIED &
HIGH QUALITY

CUSTOMIZABLE RGB
LIGHTING

INTEL XMP & AMD
EXPO READY

ARMAX RGB DDR5

FLIGHT TO THE MAX



COMPACT DESIGN
LOW-PROFILE HEATSINK

CUSTOMIZABLE
RGB LIGHTING

**AMD EXPO AND
INTEL® XMP 3.0 READY**

ARMAX DDR5

MAX POWER SOLID STYLE



COMPACT DESIGN
LOW-PROFILE HEATSINK

**AMD EXPO AND
INTEL® XMP 3.0 READY**

PMIC
FOR POWER SUPPLY STABILITY



Solid State Drive



	MARS 980 PRO	MARS 980 BLADE	MARS 970 PLUS
Capacity	1TB / 2TB / 4TB / 8TB	1TB / 2TB / 4TB / 8TB	1TB / 2TB
Form Factor	M.2 2280	M.2 2280	M.2 2280
Controller	SM2508	SM2508	-
NAND Flash	3D NAND	3D NAND	3D NAND
Interface	PCIe Gen5 x4	PCIe Gen5 x4	PCIe Gen5 x4
Sequential Read (Max)	Up to 14,000MB/s	Up to 14,000MB/s	Up to 11,000MB/s
Sequential Write (Max)	Up to 13,000MB/s	Up to 13,000MB/s	Up to 10,000MB/s
4KB Random Read IOPS(Max)	2,000K	2,000K	1,600K
4KB Random Write IOPS(Max)	1,650K	1,650K	1,400K
Operating Temperature	0°C - 70°C	0°C - 70°C	0°C - 70°C
Storage Temperature	-40°C - 85°C	-40°C - 85°C	-40°C - 85°C
Shock Resistance	1,500G/0.5ms	1,500G/0.5ms	1,500G/0.5ms
MTBF	2,000,000hours	2,000,000hours	2,000,000hours
Terabytes Written (TBW) (Max Capacity)	5,920TB	5,920TB	1,200TB
Dimensions (L x W x H)	80.5 x 24.2 x 11.2mm 3.17 x 0.95 x 0.44inch	80 x 22 x 4.5mm 3.15 x 0.87 x 0.18inch	80 x 22 x 3.9mm 3.15 x 0.87 x 0.18inch
Weight	30.3g / 1.07oz	12g / 0.42oz	10g / 0.35oz
Warranty	5-year limited warranty		



MARS 980 PRO



Fast Moves, Stay Cool

	SPECTRIX S65G	GAMMIX S70 BLADE	GAMMIX S60
Capacity	500GB / 1,000GB / 2,000GB	512GB / 1TB / 2TB / 4TB / 8,000GB	512GB / 1TB / 2TB
Form Factor	M.2 2280	M.2 2280	M.2 2280
Controller	-	IG5236	-
NAND Flash	3D NAND	3D NAND	3D NAND
Interface	PCIe Gen4 x4	PCIe Gen4 x4	PCIe Gen4 x4
Sequential Read (Max)	Up to 6,000MB/s	Up to 7,400MB/s	Up to 5,000MB/s
Sequential Write (Max)	Up to 5,000MB/s	Up to 6,800MB/s	Up to 4,200MB/s
4KB Random Read IOPS(Max)	-	Up to 750K	-
4KB Random Write IOPS(Max)	-	Up to 750K	-
Operating Temperature	0°C - 70°C	0°C - 70°C	0°C - 70°C
Storage Temperature	-40°C - 85°C	-40°C - 85°C	-40°C - 85°C
Shock Resistance	1,500G/0.5ms	1,500G/0.5ms	1,500G/0.5ms
MTBF	2,000,000hours	2,000,000hours	1,500,000hours
Terabytes Written (TBW) (Max Capacity)	640TB	5,920TB	450TB
Dimensions (L x W x H)	80 x 22 x 7mm 3.15 x 0.87 x 0.27inch	80 x 22 x 4.3mm 3.15 x 0.87 x 0.17inch	80 x 22 x 3.13mm 3.15 x 0.87 x 0.13inch
Weight	14.6g / 0.51oz	11g / 0.39oz	11g / 0.39oz
Warranty	5-year limited warranty		



LEGENDARY SPEED


14,000 / 13,000 MB/S

ACTIVE AIR-COOLING SYSTEM

15% LOWER TEMPS
COMPARED TO FANLESS HEATSINK

MARS 980 BLADE

Bladefast. Sharp Unstoppable.

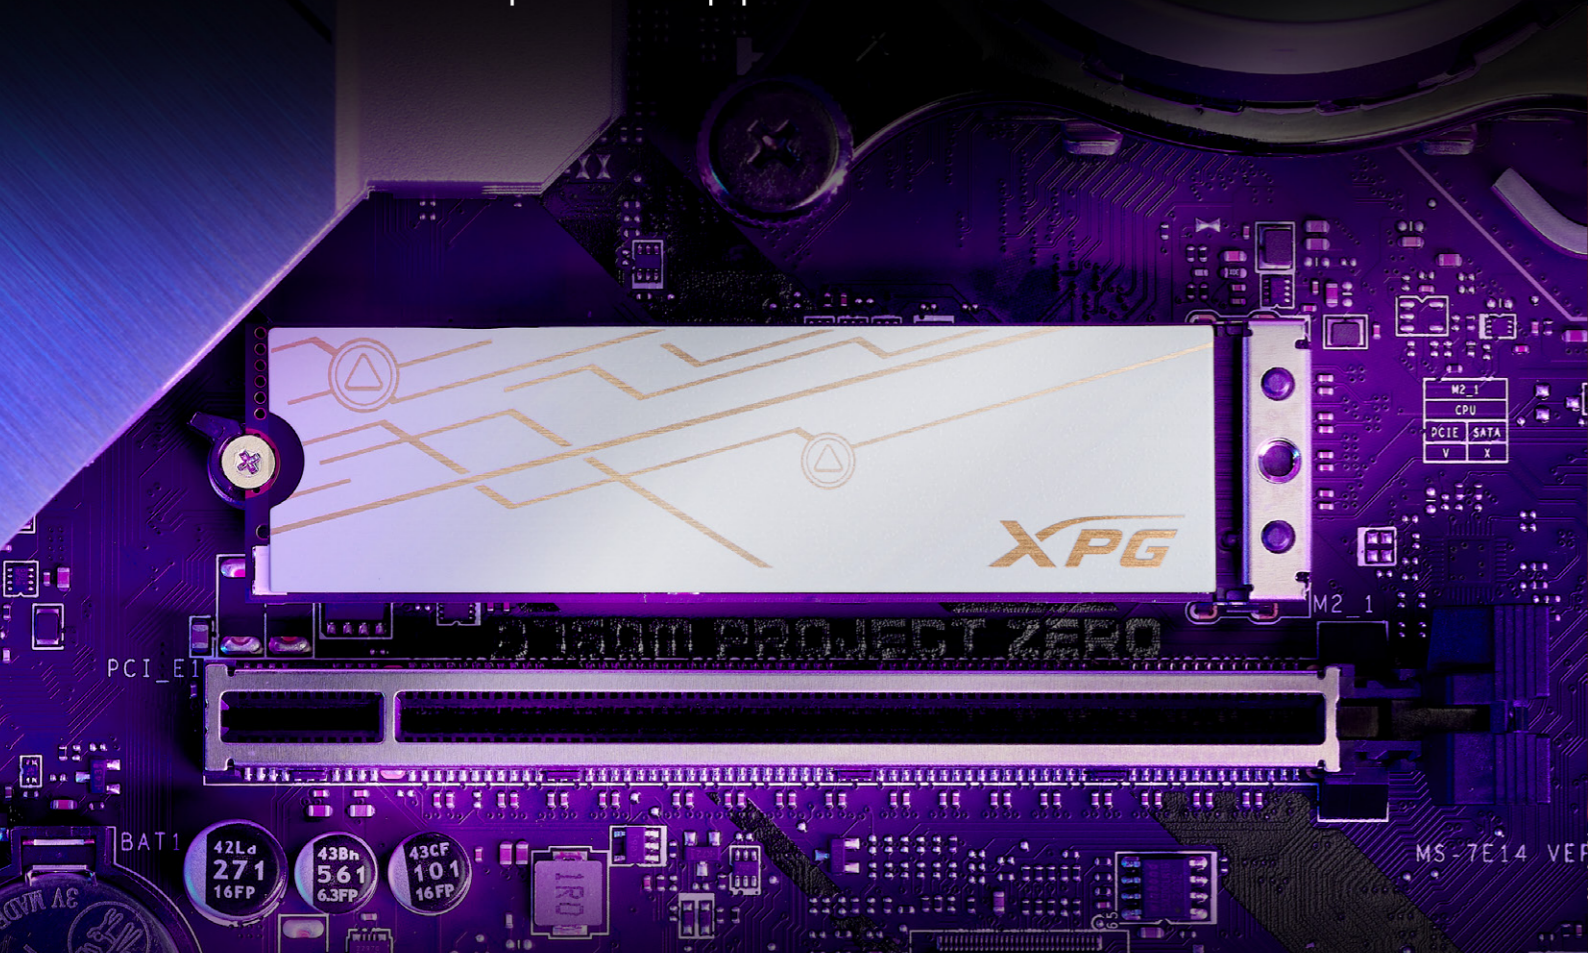


LAPTOP READY
PCIe 5.0 GAMING SSD

LEGENDARY SPEED
14,000 / 13,000 MB/S

TSMC
6nm PROCESS

MARS 970 PLUS

TOO FAST TO FIGHT BACK

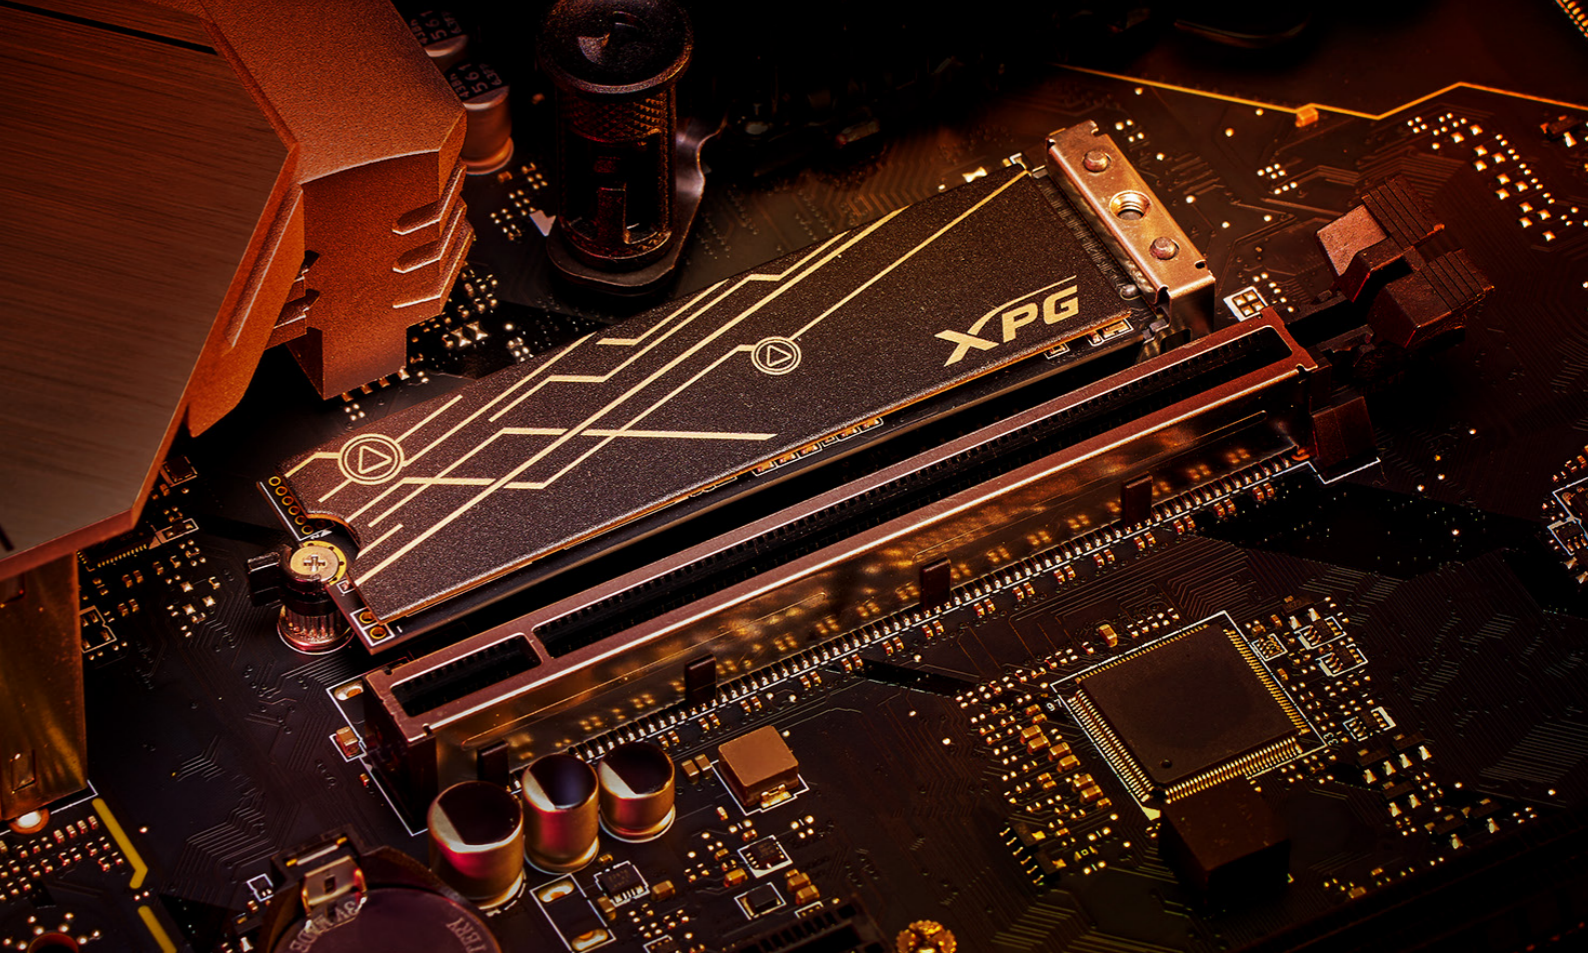

LAPTOP READY
PCIe 5.0 GAMING SSD

LEGENDARY SPEED
11,000 / 10,000MB/S

SUPERIOR
PERFORMANCE-TO-POWER
EFFICIENCY

SPECTRIX S65G

RGB ONLY. NO COMPROMISE.



**FASTEST
GEN4 RGB SSD**

**X-SHAPED
BRAND SPIRIT**

BLAZING SPEEDS
6,000 / 5,000MB/S



Power Supply Units



80 PLUS CERTIFIED EFFICIENCY

All XPG power supplies meet the stringent standards of 80 PLUS certification, ensuring high energy efficiency and reduced power waste. With less heat generated and lower electricity consumption, users can enjoy reliable performance and long-term energy savings.




CYBENETICS CERTIFICATION

XPG power supplies are also certified by Cybenetics, which provides data-driven evaluations based on real-world conditions. This certification offers clear insights into energy efficiency and acoustic performance through rigorous and transparent testing.



NEXT-GEN COMPATIBILITY

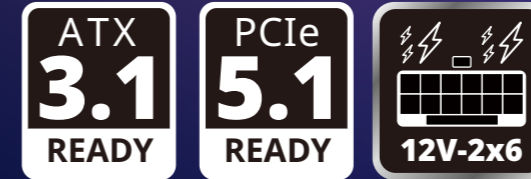

XPG power supplies are ATX 3.1 ready, support the latest 12V-2x6 connector, and meet PCIe 5.1 standards—delivering stable and efficient power for next-generation components. Designed to align with the latest platform requirements, they ensure long-term reliability and system readiness.

235% POWER EXCURSION

All XPG ATX 3.1 power supplies are designed to support up to 235% power excursion, enabling the system to handle sudden power spikes, ensuring stability, and preventing crashes during intense workloads like gaming, rendering, and data processing.

RELIABLE SAFETY PROTECTION

XPG power supplies are equipped with protection mechanisms to ensure system safety and reliability. Most models include 8 protection features that work together to safeguard against power-related issues, ensuring stable performance and long-term durability.

OVP Over Voltage Protection	UVP Under Voltage Protection	OCP Over Current Protection	OPP Over Power Protection	SCP Short Circuit Protection	OTP Over Temperature Protection	NLO No Load Operation Protection	SIP Surge and Inrush Protection
---------------------------------------	--	---------------------------------------	-------------------------------------	--	---	--	---



	FUSION	CYBERCORE II	PYMCORE SFX
Power Watt	1600W	1300W	850W / 750W
80 PLUS Rating	TITANIUM	PLATINUM	GOLD
Cybenetics	TITANIUM	PLATINUM	PLATINUM
Modular	Fully-Modular	Fully-Modular	Fully-Modular
Dimensions	210 x 150 x 86mm	160 x 150 x 86mm	125 x 100 x 63.5mm
ATX Version	ATX 3.1	ATX 3.1	ATX 3.1
Connector			
ATX 24 Pin Connector	1	1	1
EPS 8 Pin Connector	2	2	2
12V-2x6 Connector (600W)	2	1	1
PCI-E 6+2	10	10	3
SATA Connector	12	12	6
Molex 4 Pin Connector	4	8	2
Floppy 4 Pin	2	2	-
OC Link	1	-	-
PRIME Port	1	-	-
Input			
Voltage	100-240V		
Frequency	47-63 Hz	50-60Hz	50-60Hz
Current	15A	15A	10A
Fan			
Fan Size	135mm	120mm	92mm
Fan Bearing	Double Ball Bearing	Double Ball Bearing	FDB
Protections	OCP / OVP / UVP / OPP / SCP / OTP / NLO / SIP		
Warranty	12 Years	10 Years	7 Years


	CORE REACTOR II			
Power Watt	1000W	850W	750W	650W
80 PLUS Rating	GOLD			
Cybenetics	PLATINUM			
Modular	Fully-Modular			
Dimensions	140 x 150 x 86mm			
ATX Version	ATX 3.1			
Connector				
ATX 24 Pin Connector	1	1	1	1
EPS 8 Pin Connector	2	2	2	2
12V-2x6 Connector (600W)	1	1	1	1
PCI-E 6+2	8	6	6	4
SATA Connector	9	8	8	8
Molex 4 Pin Connector	3	4	4	4
Floppy 4 Pin	-	-	-	-
OC Link	-	-	-	-
PRIME Port	-	-	-	-
Input				
Voltage	100-240V			
Frequency	50-60 Hz			
Current	13A	12A	10A	12A
Fan				
Fan Size	135mm	120mm		
Fan Bearing	FDB			
Protections	OCP / OVP / UVP / OPP / SCP / OTP / NLO / SIP			
Warranty	10 Years			



	CORE REACTOR II VE			KYBER II	KYBER	
Power Watt	850W	750W	650W	850W / 750W / 650W	850W	750W / 650W
80 PLUS Rating	GOLD			GOLD	GOLD	
Cybenetics	GOLD			GOLD	PLATINUM	GOLD
Modular	Fully-Modular			Semi-Modular	Non-Modular	
Dimensions	140 x 150 x 86mm			150 x 86 x 150 mm	140 x 150 x 86 mm	
ATX Version	ATX 3.1			ATX 3.1	ATX 3.1	ATX 2.52
Connector						
ATX 24 Pin Connector	1	1	1	1	1	1
EPS 8 Pin Connector	2	2	2	2	2	2
12V-2x6 Connector (600W)	1	1	1	1	1	-
PCI-E 6+2	3	3	2	2	2	2
SATA Connector	6	6	6	6	6	6
Molex 4 Pin Connector	2	2	2	2	2	2
Floppy 4 Pin	-	-	-	-	-	-
OC Link	-	-	-	-	-	-
PRIME Port	-	-	-	-	-	-
Input						
Voltage	100-240V					
Frequency	47-63Hz			47 - 63Hz	47 - 63Hz	
Current	12A	10A	10A	10A*	12A	10A
Fan						
Fan Size	120mm			135mm	120mm	
Fan Bearing	FDB			FDB	FDB	
Protections	OCP / OVP / UVP / OPP / SCP / OTP / NLO / SIP					
Warranty	7 Years			5 Years	5 Years	

*6A (only for Argentina)

	PYLON II		PROBE
Power Watt	750W / 650W	550W	700W / 600W
80 PLUS Rating	BRONZE		BRONZE
Cybenetics	Silver		-
Modular	Non-Modular		Non-Modular
Dimensions	150 x 150 x 86mm		140 x 150 x 86mm
ATX Version	ATX 3.1		ATX 2.52
Connector			
ATX 24 Pin Connector	1	1	1
EPS 8 Pin Connector	2	2	2
12V-2x6 Connector (450W)	1	-	-
12V-2x6 Connector (300W)	-	1	-
PCI-E 6+2	2	2	2
SATA Connector	6	6	5
Molex 4 Pin Connector	2	2	2
Floppy 4 Pin	-	-	-
OC Link	-	-	-
Input			
Voltage	100-240V		
Frequency	50 - 60Hz		47 - 63Hz
Current	10A	8A	9A - 10A
Fan			
Fan Size	135mm		120mm
Fan Bearing	FDB		Sleeve-Bearing Fan
Protections	OCP / OVP / UVP / OPP / SCP / OTP / NLO / SIP		OVP / OPP / SCP / UVP / OTP / SIP
Warranty	5 Years		3 Years

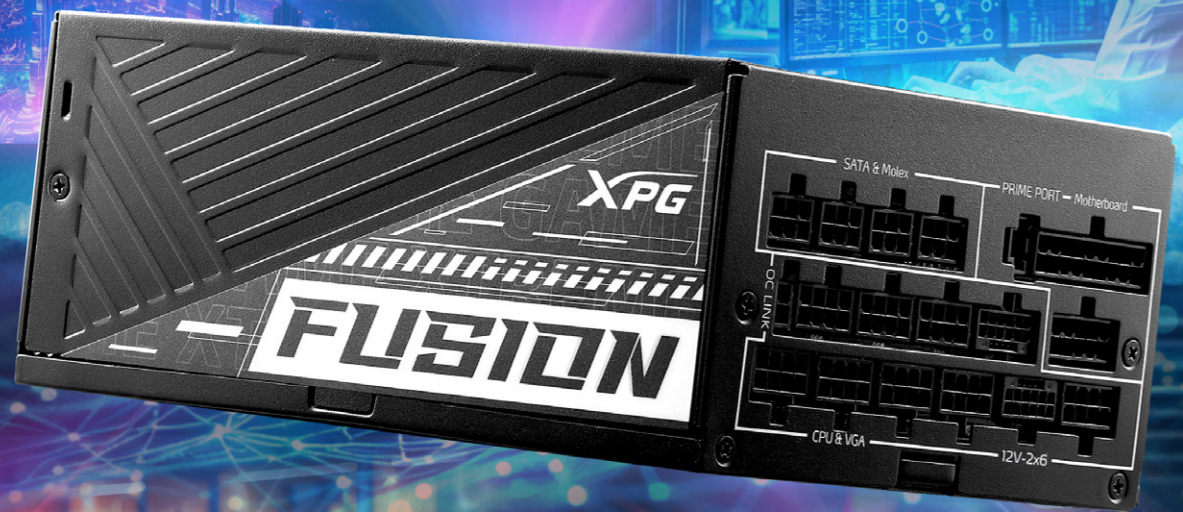

FUSION 1600 TITANIUM

SMART POWER. SMARTER AI.




WORLD'S SMARTEST POWER SOLUTION

FUSION 1600 TITANIUM is engineered for heavy AI workloads and multi-GPU systems, supporting up to four RTX 4090 GPUs simultaneously. With a patented ATX planar transformer, GaN FET technology, Triple-MCU design, XPG PRIME software control, and Xtreme Power Guard protection, it delivers extreme power density, efficiency, and stability in a compact form.

INDUSTRY-LEADING DIGITAL SOLUTION

FUSION 1600 TITANIUM features an industry-leading full-digital Triple-MCU design across Totem Pole PFC, full-bridge LLC, software control, and data management. This cutting-edge architecture enhances system reliability, extends component lifespan, and enables real-time performance monitoring.

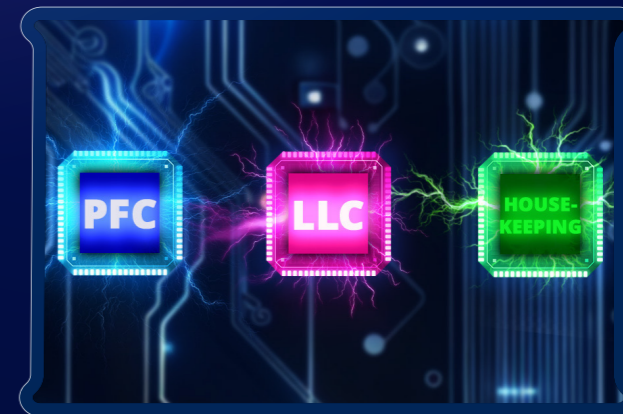

FULL DIGITAL CONTROL BY XPG PRIME

FUSION 1600 TITANIUM's fully digital, modular design enables precise monitoring and control through XPG PRIME, including a real-time dashboard, in-app OCP configuration, and 30-day history logs.

XTREME POWER GUARD

Xtreme Power Guard is a series of protections and guidelines that ensure top-tier reliability and all-round safety under power-demanding workloads, reflecting XPG's consistent commitment.



REAL WORLD APPLICATIONS

Lightshow Creation

Creative studios using high-performance image rendering for landscape lightshow production.

Data Analysis

Advanced computing for forensic labs and medical data analysis.

Architecture & Engineering

Powerful workstations designed to meet high wattage demands for CAD, modeling, video and visual editing.

Simulators

Customized workstation for remote controlling and simulation systems.



CYBERCORE II PLATINUM

BETTER THAN ULTIMATE



CYBENETICS PLATINUM
CERTIFIED

ATX 3.1 READY
12V-2X6 CONNECTOR

XPG VENTO PRO
120 PWM

CORE REACTOR II

IMPROVE YOUR CORE,
ENHANCE YOUR PERFORMANCE




PLATINUM CYBENETICS
CERTIFIED

ATX 3.1 READY
12V-2X6 CONNECTOR

FULLY MODULAR
DESIGN

CORE REACTOR II VE

IMPROVE YOUR CORE,
ENHANCE YOUR PERFORMANCE

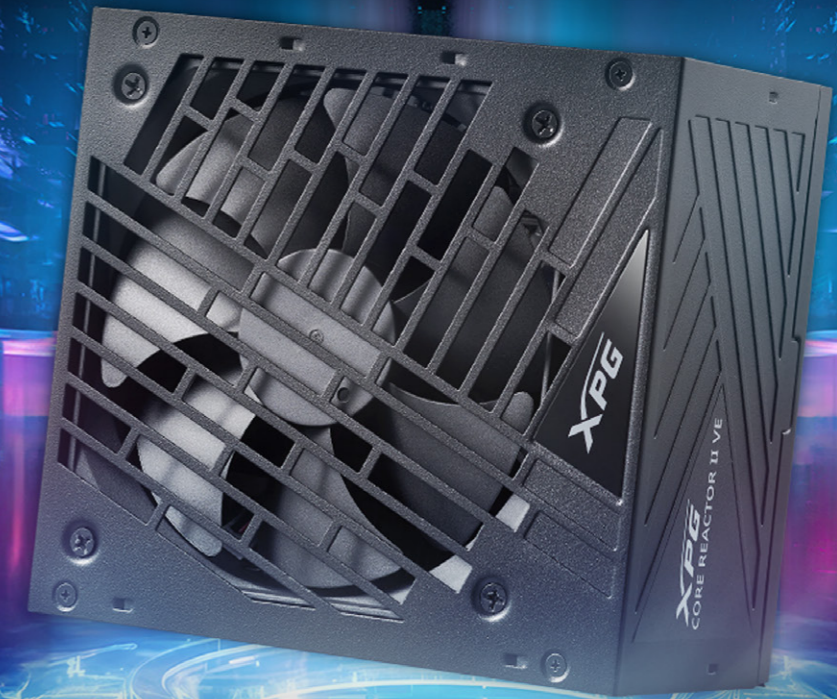

GOLD CYBENETICS
CERTIFIED

ATX 3.1 READY
12V-2X6 CONNECTOR

LOW RIPPLE NOISE
DESIGN

PYMCORE SFX

UNDERSIZED. OVERPOWERED.



COMPACT SFX
SIZE

HIGH-DUTY
CAPACITOR ARRAY

ATX 3.1 READY
12V-2X6 CONNECTOR

KYBER II

FORGE THE POWER



JAPANESE 105°C
MAIN CAPACITOR

QUIET 135MM
FDB FAN

ATX 3.1 READY
12V-2X6 CONNECTOR

PYLON II

UNLEASH THE SURGE



SILVER CYBENETICS
CERTIFIED

ATX 3.1 READY
12V-2X6 CONNECTOR

135MM
FDB FAN

PROBE

VIABLE, APPLIABLE, & RELIABLE



80 PLUS BRONZE
EFFICIENCY

ATX V2.52 STANDARDS
COMPLIANCE

COMPACT 140MM
LENGTH FOR EASY
INSTALLATION

XPG

PC Chassis



USER-CENTRIC DESIGN

Select XPG chassis feature magnetic front panels for effortless, tool-free upgrades and maintenance. The snap-on, snap-off design provides quick access for cleaning, cooling adjustments, or new components, while the streamlined look enhances function and style.

FUTURE-READY COMPATIBILITY

XPG chassis with reverse-connector motherboard support improve build flexibility, airflow, and cable management for a cleaner, more efficient high-performance setup.



BUILT STRONG. BUILT TO IMPRESS.

Durable and stylish, XPG chassis strengthen case structure, optimize airflow, and showcase internal components. Their simple yet thoughtful design delivers the stability high-performance builds demand, making every rig look and feel battle-ready.

INVADER X SERIES



STARKER SERIES



	INVADER X MINI	INVADER X BTF	INVADER X
Dimension	460 x 210 x 359mm	485 x 245 x 448mm	475 x 245 x 448mm
Color	Black / White	Black	Black
Material	SPCC / 4mm Tempered Glass	SPCC / 3mm Tempered Glass	SPCC / 3mm Tempered Glass
Form Factor	ATX, Micro-ATX, Mini-ITX	ATX, Micro-ATX, Mini-ITX ATX, Micro-ATX (Reverse-Connector Motherboards)	ATX, Micro-ATX, Mini-ITX Micro-ATX (Reverse-Connector Motherboards)
Expansion Slots	7	7 or 4 Vertical	7 or 4 Vertical
Drive Bays	2 x 2.5", 1 x 3.5" 1 x 2.5" / 3.5"	3 x 3.5" / 2.5"	3 x 3.5" / 2.5"
I/O Port	USB 3.2 Type C x1 USB 3.2 Type A x1 Hybrid Audio Jack x1	USB 3.2 Type C x1 USB 3.2 Type A x2 Hybrid Audio Jack x1	USB 3.2 Type C x1 USB 3.2 Type A x2 Hybrid Audio Jack x1
Fan Included	5 x 120mm ARGB	5 x 120mm ARGB Fans	5 x 120mm ARGB Fans
Fan Support	Rear: 120mm x 1 Top: 120mm x 2 / 140mm x 2 PSU Shroud: 120mm x 2	Rear: 120mm x 1 / 140mm x 1 Top: 120mm x 3 / 140mm x 2 Side: 120mm x 3 Bottom: 120mm x 1 / 140mm x 1 PSU Shroud :120mm x 2	Rear: 120mm x 1 / 140mm x 1 Top: 120mm x 3 / 140mm x 2 Side: 120mm x 3 Bottom: 120mm x 1 / 140mm x 1 PSU Shroud :120mm x 2
Radiator Support	Rear: 120mm Top: 240mm	Rear: 120mm Top: 360mm / 240mm / 120mm Side: 360mm / 240mm / 120mm	Rear: 120mm Top: 360mm / 240mm / 120mm Side: 360mm / 240mm / 120mm
GPU Length Support	Up to 330mm	Up to 400mm	Up to 400mm
Air Cooler Height Support	Up to 166mm	Up to 175mm	Up to 175mm
PSU Length Support	Up to 180mm	Up to 240mm	Up to 240mm

	STARKER AIR BTF
Dimension	496 x 242 x 464mm
Color	Black / White
Material	SPCC / 3mm Tempered Glass
Form Factor	ATX, Micro-ATX, Mini-ITX, ATX, Micro-ATX (Reverse-Connector Motherboards)
Expansion Slots	7 or 4 Vertical
Drive Bays	2 x 2.5" / 3.5" 2 x 2.5", 1 x 3.5" (with E-ATX Bracket)
I/O Port	USB 3.2 Type C x1 USB 3.2 Type A x2 Hybrid Audio Jack x1 LED Button x1
Fan Included	4 x 120mm ARGB Fans
Fan Support	Front: 120mm x 3 / 140mm x 3 Top: 120mm x 3 / 140mm x 2 Rear: 120mm x 1 / 140mm x 1 PSU Shroud: 120mm x 3 Side: 120mm x 2 (with E-ATX bracket removed)
Radiator Support	Front: 360 / 280 / 240 / 120mm Top: 360 / 280 / 240 / 120mm Rear: 140 / 120mm
GPU Length Support	Up to 390mm
Air Cooler Height Support	Up to 180mm
PSU Length Support	Up to 220mm

VALOR SERIES



	VALOR AIR PRO	VALOR AIR NANO	VALOR MESH NANO
Dimension	490 x 215 x 467mm	357 x 220 x 436 mm	357 x 220 x 436 mm
Color	Black / White	Black / White	Black / White
Material	SPCC / 4mm Tempered Glass	SPCC	SPCC
Form Factor	E-ATX, ATX, Micro-ATX, Mini-ITX	Micro-ATX, Mini-ITX	Micro-ATX, Mini-ITX
Expansion Slots	7	5	5
Drive Bays	2x 2.5" 2x 2.5" / 3.5"	2x 2.5" 1x 3.5"	2x 2.5" 1x 3.5"
I/O Port	USB 3.2 Type C x1 USB 3.2 Type A x2 Hybrid Audio Jack x1	USB 3.2 Type C x1 USB 3.2 Type A x2 Hybrid Audio Jack x1	USB 3.2 Type C x1 USB 3.2 Type A x2 Hybrid Audio Jack x1
Fan Included	4 x 120mm ARGB Fan	1 x 120mm ARGB Fan	1 x 120mm ARGB Fan
Fan Support	Front: 120mm x 3 / 140mm x 3 Top: 120mm x 3 / 140mm x 2 Rear: 120mm x 1 Side: 120mm x2 (ATX, m-ATX, ITX only)	Top: 120 mm x3 / 140 mm x2 Rear: 120 mm x1 Bottom: 120 mm x2	Top: 120 mm x3 / 140 mm x2 Rear: 120 mm x1 Bottom: 120 mm x2
Radiator Support	Top: 360mm / 280mm / 240mm Front: 360mm / 280mm / 240mm Rear: 120mm	Top: 360mm / 240mm Rear: 120mm	Top: 360mm / 240mm Rear: 120mm
GPU Length Support	Up to 400mm	Up to 370mm	Up to 370mm
Air Cooler Height Support	Up to 167mm	Up to 170mm	Up to 170mm
PSU Length Support	Up to 200mm	Up to 170mm	Up to 170mm

VALOR SERIES



	VALOR AIR PLUS	VALOR MESH	VALOR AIR
Dimension	482 x 200 x 400mm	460 x 210 x 371 mm	460 x 210 x 371 mm
Color	Black / White	Black / White	Black / White
Material	SPCC / 3mm Tempered Glass	SPCC / 3mm Tempered Glass	SPCC / 3mm Tempered Glass
Form Factor	ATX, Micro-ATX, Mini-ITX	ATX, Micro-ATX, Mini-ITX	ATX, Micro-ATX, Mini-ITX
Expansion Slots	7	7	7
Drive Bays	2x 2.5", 1x 3.5" 1x 2.5" / 3.5"	2x 2.5", 1x 3.5" 1x 2.5 / 3.5"	2x 2.5", 1x 3.5" 1x 2.5 / 3.5"
I/O Port	USB 3.2 Type A x2 Hybrid Audio Jack x1	USB 3.2 Type A x2 Hybrid Audio Jack x1	USB 3.2 Type A x2 Hybrid Audio Jack x1
Fan Included	4 x 120mm ARGB Fans	4x 120mm Fans	4x 120mm Fans
Fan Support	Front: 120mm x3 Top: 120mm x2 Rear: 120mm x1	Front: 120mm x3 / 140mm x2 Top: 120mm x2 / 140mm x2 Rear: 120mm x1	Front: 120mm x3 / 140mm x2 Top: 120mm x2 / 140mm x2 Rear: 120mm x1
Radiator Support	Front: 360 / 240mm Top: 240mm Rear: 120mm	Front: 360 / 280 / 240mm Top: 240mm Rear: 120mm	Front: 360 / 280 / 240mm Top: 240mm Rear: 120mm
GPU Length Support	Up to 340mm (with pre-installed fans)	Up to 335mm	Up to 335mm
Air Cooler Height Support	Up to 160mm	Up to 166mm	Up to 166mm
PSU Length Support	Up to 170mm	Up to 180mm	Up to 180mm

LANDER SERIES



	LANDER 300	LANDER 500	LANDER 501
Dimension	431 x 242 x 456mm	450 x 200 x 405mm	490 x 215 x 467mm
Color	Black / White	Black	Black
Material	SPCC / 3mm Tempered Glass	SPCC / 3mm Tempered Glass	SPCC / 4mm Tempered Glass
Form Factor	Micro-ATX, Mini-ITX Micro-ATX (Reverse-Connector Motherboards)	ATX, Micro-ATX, Mini-ITX	E-ATX, ATX, Micro-ATX, Mini-ITX
Expansion Slots	5	7	7
Drive Bays	2x 2.5" / 3.5"	2x 2.5" 2x 3.5"	2x 2.5" 2x 2.5" / 3.5"
I/O Port	USB 3.2 Type A x2 Hybrid Audio Jack x1	USB 3.2 Type A x2 Hybrid Audio Jack x1	USB 3.2 Type C x1 USB 3.2 Type A x2 Microphone Jack x1 Headphone Jack x1
Fan Included	4 x 120mm ARGB Fan	4 x 120mm ARGB Fan	4 x 120mm ARGB Fan
Fan Support	Front: 120mm x 3 / 140mm x 2 Top: 120mm x 3 / 140mm x 2 Rear: 120mm x 1 / 140mm x 1 Side: 120mm x 2 PSU Shroud: 120mm x 3	Front: 120mm x3 / 140mm x2 Top: 120 mm x2 Rear: 120 mm x1	Front: 120mm x 3 / 140mm x 3 Top: 120mm x 3 / 140mm x 2 Rear: 120mm x 1
Radiator Support	Top: 360 / 280 / 240mm Rear: 120 / 140mm Side: 240mm	Front: 360mm / 240mm Rear: 120mm	Top: 360mm / 280mm / 240mm Front: 360mm / 280mm / 240mm Rear: 120mm
GPU Length Support	Up to 390mm	Up to 340mm	Up to 400mm
Air Cooler Height Support	Up to 180mm	Up to 160mm	Up to 167mm
PSU Length Support	Up to 200mm	Up to 170mm	Up to 200mm

INVADER X MINI

MINI CASE, MAX VIEW



COMPACT
DIMENSIONS

PANAROMIC
VIEW CASE

SUPPORTS
UP TO
ATX MOTHERBOARDS

INVADER X BTF

BUILT FOR THE FUTURE



SUPPORTS
REVERSE-CONNECTOR
MOTHERBOARDS

SUPPORTS
UP TO
ATX MOTHERBOARDS

SUPPORTS
VERTICAL OR HORIZONTAL
GPU INSTALLATION

STARKER AIR BTF

STYLE. AIRFLOW. PERFORMANCE.



PREMIUM
RGB-ILLUMINATED
STEEL MAGNETIC FRONT PANEL

SUPPORTS UP TO
12X 120MM FANS

SUPPORTS
REVERSE-CONNECTOR
MOTHERBOARDS

VALOR AIR PRO

ENDLESS POSSIBILITIES



SUPPORTS UP TO
9 FANS AND 360 MM
RADIATORS

COMPATIBLE
WITH E-ATX
MOTHERBOARDS

MAGNETIC FRONT PANEL
& DUST FILTERS
FOR EASY CLEANING

VALOR AIR PLUS

ENDLESS POSSIBILITIES



HIGH-AIRFLOW
MAGNETIC FRONT
PANEL

SUPPORTS UP TO
ATX MOTHERBOARDS

GRAPHICS CARDS
SUPPORT UP
TO 340MM LONG

VALOR MESH NANO

BREATHE BOLD, MESH FIERCE



SUPPORTS UP TO
370MM LONG GPU
GEFORCE RTX 50
GPU READY

READY FOR
360MM RADIATOR

BUILT-IN TOOL-FREE
MESH PANELS

VALOR AIR NANO

SLASH HEAT, STEAL LOOKS



SUPPORTS UP TO
370MM LONG GPU
GEFORCE RTX 50
GPU READY

READY FOR
360MM RADIATOR

5 DUST FILTERS
WITH SLASH-STYLE
TOOL FREE PANEL

XPG COOLING SOLUTIONS

STAY COOL, STAY AHEAD

XPG cooling solutions combine next-gen thermal technology with hardware and software integration to deliver efficient heat dissipation, quiet operation, and reliable performance for high-demand systems. The portfolio spans case fans, CPU air coolers, and AIO liquid coolers, designed to support evolving builds across different user scenarios.

INNOVATIVE DUAL-CHAMBER PUMP

One of our proudest features – the Dual-Chamber Pump Technology – brings exceptional cooling performance. This design ensures precise liquid separation for enhanced heat exchange efficiency, while an advanced three-phase motor reduces vibration for quieter operation and long-lasting durability.

EVOLVING COOLING

XPG's latest award-winning cooling solution combines adaptive airflow control, reversible fan direction, and magnetic modular connectivity together to simplify installation, optimize thermal performance, and enable more flexible PC builds.



PC Case Fan



	HURRICANE MAG 120 ARGB PWM	HURRICANE 120 ARGB PWM
Color	Black / White	Black / White
Connector Type	4-Pin PWM	4-Pin PWM
Dimensions	120 x 120 x 25mm	120 x 120 x 25mm
Fan Speed	2000 RPM	600 ~ 2000 RPM ± 10%
Max Static Pressure	Standard: 2.74mm-H ₂ O Reverse: 3.29mm-H ₂ O	1.42mm H ₂ O ±10%
Max Air Flow	Standard: 54.82 ± 10% CFM Reverse: 49.27 ± 10% CFM	61.5 CFM ±10%
Average Noise Level	Standard: 23.3 dBA Reverse: 31.3 dBA	20 dBA
Fan Rated Current	0.2A (Max)	0.2A (Max)
Fan Rated Voltage	DC 12V	DC 12V
Fan Starting Voltage	DC 7V	DC 3.5V
Fan Operating Voltage	DC 5V ~ 12.6V	DC 3.5V~12.6V
Fan Power Dissipation	2.4W	2.4W
Bearing Type	Rifle Bearing	Fluid Dynamic Bearing

PC Case Fan



	INFINITY F360 ARGB PWM	INFINITY F120 ARGB PWM	INFINITY R120 ARGB PWM
Color	Black, White	Black, White	Black, White
Dimensions	360 x 120 x 27mm	120 x 120 x 27mm	120 x 120 x 27mm
Bearing Type	Hydraulic Bearing	Hydraulic Bearing	Hydraulic Bearing
Speed (RPM)	800-2000 RPM	800-2000 RPM	800-2000 RPM
Maximum Air Flow	58.42 CFM	58.42 CFM	57.56 CFM
Maximum Static Pressure	2.09 mm-H ₂ O	2.09 mm-H ₂ O	1.96 mm-H ₂ O
Average Fan Noise	29.72 dB(A) total 19.53 dB(A) per fan	19.91 dB(A)	22.29 dB(A)
Fan Connector	4-pin PWM	4-pin PWM	4-pin PWM
LED Connector	5V 3-pin ARGB	5V 3-pin ARGB	5V 3-pin ARGB
Fan Rated Voltage	DC 12V	DC 12V	DC 12V
LED Rated Voltage	DC 5V	DC 5V	DC 5V
Operating Voltage	DC 7V~ 12.6V	DC 7V~ 12.6V	DC 7V~ 12.6V
Fan Protection	Auto-Restart	Auto-Restart	Auto-Restart
Weight	550g	210g	210g

PC Case Fan



	VENTO 120 ARGB PWM	VENTO R 120 ARGB PWM	VENTO PRO 120 PWM
Color	Black / White	Black / White	Black
Connector Type	4-Pin PWM	4-Pin PWM	4-Pin PWM
Dimensions	120 x 120 x 25mm	120 x 120 x 25mm	120 x 120 x 25mm
Fan Speed	300~1850 ± 200 RPM	300~1600 RPM ± 10%	DC Mode:450~2150 RPM±10%
Max Static Pressure	1.5mm H ₂ O ±10%	1.65mm H ₂ O ±10%	3.15 mm H ₂ O
Max Air Flow	50 CFM	65 CFM	75 CFM
Average Noise Level	29 dBA	25.7 dBA	28 dBA
Fan Rated Current	0.2A (Max)	0.2A (Max)	0.16A (Max)
Fan Rated Voltage	DC 12V	DC 12V	DC 12V
Fan Starting Voltage	DC 5V	DC 5V	DC 5V
Fan Operating Voltage	DC 5V~12.6V	DC 5V~12.6V	DC 5V~13.2V
Fan Power Dissipation	2.4W	2.4W	1.56W
Bearing Type	Rifle Bearing	Rifle Bearing	Dual Bearings

All-in-one Liquid Cooler




	LEVANTE II 360	LEVANTE II 240
Color	Black / White	Black / White
Pump & Block		
Water Block Dimension (H*W*D)	67 x 62.5 x 50.2 mm	67 x 62.5 x 50.2 mm
Water Block Material	Copper	Copper
Control Mode	PWM (4-Pin)	PWM (4-Pin)
Application		
Intel Socket	LGA 1851, 1700, 1200, 115x	LGA 1851, 1700, 1200, 115x
AMD Socket	AM5, AM4	AM5, AM4
Radiator		
Radiator Dimension	396 x 120 x 27 mm	276 x 120 x 27 mm
Radiator Material	Aluminum	Aluminum
Tube	Sleeved Rubber Tube	Sleeved Rubber Tube
Fan		
Fan Dimension	360 x 120 x 27 mm	240 x 120 x 27 mm
Bearing Type	Hydraulic Bearing	Hydraulic Bearing
Fan Speed	800-2,000 RPM ±10%	600-2,000 RPM ±10%
Fan Static Pressure	2.04 mm-H ₂ O	2.04 mm-H ₂ O
Fan Air Flow	58.91 CFM	58.91 CFM
Average Noise Level	29.33 dBA / 19.78 dBA per fan	26.7 dBA / 19.78 dBA per fan

CPU Air Cooler



	MAESTRO PLUS 62DA	MAESTRO PLUS 42SA
Color	Black	Black
Dimensions	120 x 160 x 126mm	120 x 156 x 71mm
Heat Pipes	6pcs	4pcs
Cooling Capacity	250W	220W
Connector	4-pin PWM 3-pin 5V ARGB 9-pin USB	4-pin PWM 3-pin 5V ARGB 9-pin USB
Application		
Intel Socket	LGA 1851, 1700, 1200, 115x	LGA 1851, 1700, 1200, 115x
AMD Socket	AM5, AM4, AM3	AM5, AM4, AM3
Fan		
Fan Dimensions	120 x 120 x 25mm	120 x 120 x 25mm
Bearing Type	Fluid Dynamic Bearing	Fluid Dynamic Bearing
Fan Speed	800-1,800 RPM ±10%	800-1,800 RPM ±10%
Fan Static Pressure	1.83mm-H2O	1.83mm-H2O
Fan Air Flow	70.81 CFM (Max.)	70.81 CFM (Max.)
Average Noise Level	21.44 dBA	21.44 dBA
Fan Power Consumption	≤3W	≤3W
MTTF	70,000 Hours (at 25°C)	70,000 Hours (at 25°C)

CPU Air Cooler



	MAESTRO 62DA	MAESTRO 42SA
Color	Black	Black
Dimensions (L x W x H)	120 x 117 x 155 mm	120 x 69 x 149 mm
CPU Socket Support	Intel: LGA 1851,1700,1200,115x	Intel: LGA 1851,1700,1200,115x
Heat Pipes	6 pcs	4 pcs
Heat Pipe Material	Copper	Copper
Fin Material	Aluminium	Aluminium
Fan Dimensions (L x W x H)	120 x 120 x 25 mm	120 x 120 x 25 mm
Bearing Type	Fluid Dynamic Bearing (FDB)	Fluid Dynamic Bearing (FDB)
Fan Speed	800-2,100 RPM	800-2,100 RPM
Maximum Fan Static Pressure	2.78 mm-H ₂ O	2.78 mm-H ₂ O
Maximum Fan Air Flow	75.49 CFM	75.49 CFM
Average Fan Noise	21.44 dB(A)	21.44 dB(A)
Fan Connector	4-pin PWM	4-pin PWM
LED Connector	3-pin 5V ARGB	3-pin 5V ARGB
Weight	1.2 kg	700 g

HURRICANE MAG

CLICK ON, COOL ON.



MAGNETIC
CONNECTOR DESIGN

MANUAL FAN
DIRECTION CONTROL

PATENTED DUAL-SPIN
BLADE DESIGN

LEVANTE II 360/240

COOLING WITHOUT BOUNDARIES



INFINITY MIRROR
DESIGN

DUAL-CHAMBER
DESIGN SUPPORTS
UP TO 320W TDP

PRE-INSTALLED
ARGB PWM FANS

MAESTRO PLUS 62DA

BE COOL. GO DIGIT.



REAL-TIME DIGITAL
STATUS PANEL

SUPERIOR DUAL
TOWER DESIGN

NEXT-GEN 250W
COOLING CAPACITY

MAESTRO PLUS 42SA

BE COOL. GO DIGIT.



REAL-TIME DIGITAL
STATUS PANEL

COMPACT SINGLE
TOWER DESIGN

FULL PERFORMANCE 220W
COOLING CAPACITY

MAESTRO 62DA

THE POWER OF AIR



DUAL TOWER WITH
6 HEAT PIPES

UP TO 230W
COOLING CAPACITY

UP TO LGA 1861 /
SOCKET AM5 SUPPORT

MAESTRO 42SA

THE POWER OF AIR




SINGLE TOWER WITH
4 HEAT PIPES

UP TO 200W
COOLING CAPACITY

UP TO LGA 1861 /
SOCKET AM5 SUPPORT

INFINITY F360

INFINITE LOOK. DEFINITE COOL.

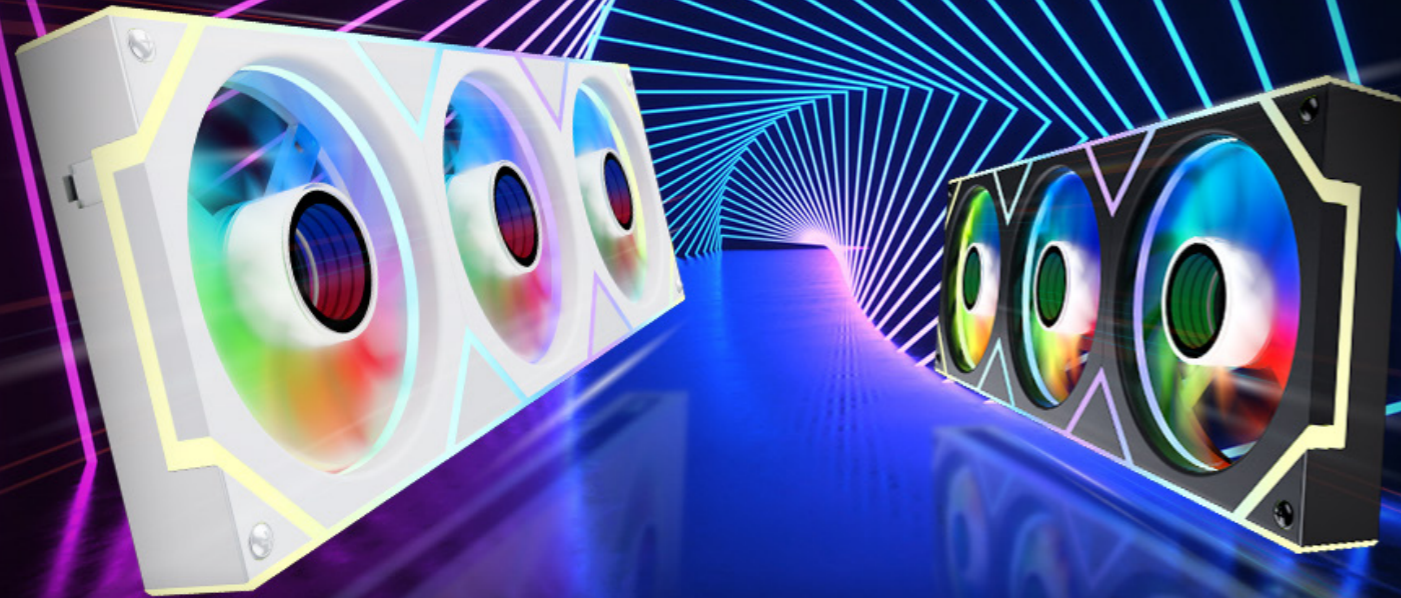


INFINITE MIRROR
AESTHETIC

SINGLE FRAME DESIGN
FOR TRIPLE FANS

SINGLE CABLE,
EASY TO INSTALL

INFINITY F120/R120

INFINITE LOOK. DEFINITE COOL.

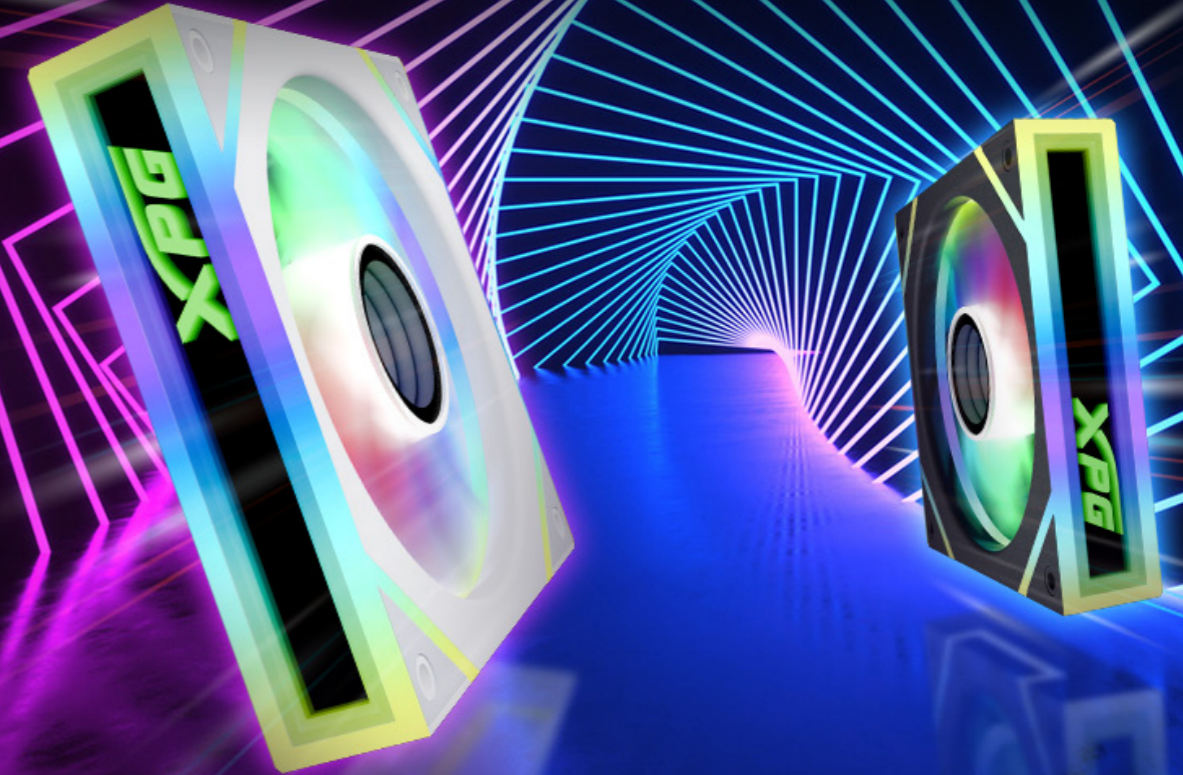

INFINITE MIRROR
AESTHETIC

FORWARD AND
REVERSE OPTIONS

ANTI-RESONANCE
MOUNTING DESIGN

XPG GAMING GEARS



GAMING CHAIR



	NEXUS PLUS	NEXUS
Color	Black / Black and Red	Black / Black and Red
Seat Cover Material	Leatherette	Fabric (Water-Repellent)
Five-Star Base	Steel Base	Steel Base
Wheel Size	75mm PU Wheel	65mm PU Wheel
Headrest Pillow	Yes	Yes
Lumbar Support	Dynamic Lumbar Support System	Built-in Lumbar Curve Support
Adjustable Back Angle	90° - 155°	90° - 155°
Foam Type	High Density Modelling Foam	High Density Modelling Foam
Adjustable Armrests	4D	2D
Tilt Mechanism	Deer Mechanism	Butterfly Mechanism
Gas Lift Piston	Class-4	Class-4
Seat Back Style	High-back	High-back
Max Weight Capacity	125 kg	125 kg
Backrest Length	87cm	83cm
Backrest Width	57cm	51cm
Seatbase Width	57cm	51cm
Seat Depth	57cm	45.5cm
Armrest to Armrest	75cm	66cm
Floor to Seatbase	49-57cm	48.5-54.5cm
Wheelbase Diameter	66cm	71.5 cm

GAMING CHAIR



	NIMBUS PLUS	NIMBUS
Color	Black / Grey	Black / Grey
Seat Cover Material	High Elasticity Mesh	High Density Molded Foam
Tilt Range	90° -130°	90° -130°
Tilt Mechanism	Butterfly	Butterfly
Headrest	Dual-Axis Adjustable	Integrated
Backrest	Height Adjustable (50 mm)	Height Adjustable (50 mm)
Lumbar	3D Adaptive Support	Integrated
Armrests	4D Adjustable	2D Adjustable
Seat	Depth Adjustable	-
Base	350 mm Metal	350 mm Metal
Wheels	75 mm PU	75 mm PU
Gas Lift	Class 4	Class 4
Maximum Load	120 kg	120 kg
Backrest Length	63.6 cm	72 cm
Backrest Width	48.5 cm	47 cm
Seatbase Width	47 cm	50 cm
Seat Depth	51 cm	43.5 cm
Armrest to Armrest	68.5 cm	71 cm
Floor to Seatbase	52 cm	55 cm
Wheelbase Diameter	70.5 cm	73 cm

HEADSET



PRECOG STUDIO	
Connector	4.4mm Audio Jack 3.5 mm Microphone Jack USB-C DAC USB-C to A Adatpter
Driver Size	50mm
Frequency Response	20~20,000Hz
Sensitivity	101dB±3dB
Mic Directivity	Omnidirectional
Size (LxWxH)	216x192x91mm
DAC	
Size	50mm x 27mm x 13mm
DAC Chip	ESS Chip
Audio Format	Up to 32bits/96kHz
Input	USB-Type C
Output	4.4mm Audio Port 3.5mm Microphone Port

KEYBOARD



	SORCERER	SORCERER MINI
Mounting Style	Gasket Mount	Gasket Mount
Weight	730g	530g
Dimensions	388x137x41mm	324 x 115 x 41 mm
Key Switch	XPG Red Mechanical Switch	XPG Red Mechanical Switch
Lighting Effect	Per-Key RGB 10 Preset Lighting Effects	Per-Key RGB 10 Preset Lighting Effects
Number of keys	97 Keys (ANSI) / 98 Keys (ISO)	66 Keys (ANSI) / 67 Keys (ISO)
Interface	USB Type C	USB Type C
PRIME Software Support	Yes	Yes

MOUSE PAD



	FRONTLINE III XL	FRONTLINE XL SAGA SERIES (2026)
Color	Black	SAGA 05 / SAGA 06 / SAGA 07
Material	Microfiber	Microfiber
WxLxD	900 x 400 x 3mm	900 x 400 x 3mm

PRECOG STUDIO

IMMERSE | AMPLIFY | SLAY



THE WORLD'S FIRST
BALANCED GAMING HEADSET

4.4MM CONNECTOR
ZERO-CROSSTALK CIRCUIT DESIGN

USB-C DAC
SUPERIOR ESS AUDIO CHIPSET

NEXUS

PLUSH FABRIC, GAME-ON COMFORT!



BUILT-IN LUMBAR
CURVE SUPPORT

SOFT,
WATER-REPELLENT FABRIC

RECLINES
FROM 90° TO 155°

NEXUS PLUS

PREMIUM COMFORT, PRO-LEVEL PERFORMANCE.



DYNAMIC LUMBAR
SUPPORT SYSTEM

4D ADJUSTABLE
ARMRESTS

PREMIUM
LEATHERETTE FINISH

NIMBUS

CONTOURED COMFORT



ERGONOMIC
UNIBODY DESIGN

HEIGHT ADJUSTABLE
MESH BACKREST

HIGH DENSITY 8 CM
MOLDED FOAM SEAT

NIMBUS PLUS

BEYOND BREATHABLE



ERGONOMIC DESIGN
WITH LUMBAR SUPPORT
AND SLIDING SEAT

BREATHABLE
HIGH-ELASTICITY MESH

4D ARMRESTS AND
DUAL-AXIS HEADREST

FRONTLINE III XL

GLIDE. GRIP. DOMINATE.



PRECISION MICROFIBER
SURFACE

900 X 400 MM
XL DESIGN

ANTI-SLIP
RUBBER BASE

FRONTLINE XL

2026 SERIES



PRECISION MICROFIBER
SURFACE

900 X 400 MM
XL DESIGN

ANTI-SLIP
RUBBER BASE

SORCERER

SPELL IT OUT



GASKET MOUNT DESIGN
TRIPLE-LAYERED DAMPENING FOAM

XPG RED SWITCH
SMOOTH TYPING EXPERIENCE

96% FORM FACTOR
COMPACT DESIGN

SORCERER MINI

SPELL IT



GASKET MOUNT DESIGN
TRIPLE-LAYERED DAMPENING FOAM

XPG RED SWITCH
SMOOTH TYPING EXPERIENCE

65% FORM FACTOR
ULTRA PORTABLE



XPG



XPG PRIME SOFTWARE

Enjoy unlimited RGB customization and synchronized lighting across all of your compatible XPG peripherals, components, and memory modules.

<https://prime.xpg.com/>

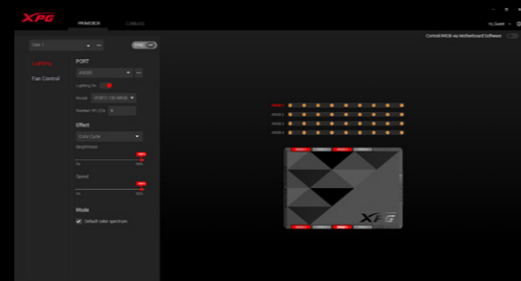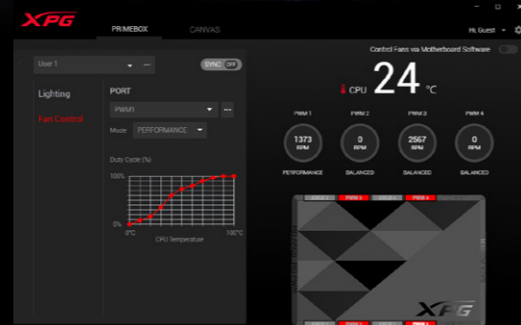

XPG

Headquarters

ADATA Technology Co., Ltd.
Taipei
T: +886-2-8228-0886
E: adata@adata.com

Asia

Beijing, China
T: +86-10-8289-9532
E: adata_bj@adata.com

Hong Kong, China
T: +852-2127-7072
E: adata_hk@adata.com

Shanghai, China
T: +86-21-6233-1010
E: adata_sh@adata.com

Tokyo, Japan
T: +81-3-5807-0011
E: adata_jp@adata.com
E: IASales_jp@adata.com

Shenzhen, China
T: +86-755-8882-3637
E: adata_sz@adata.com

Delhi, India
T: +91-11-44731886
E: adata_delhi@adata.com

Manufacturing Facilities

Suzhou, China
T: +86-512-6593-0886
E: adata@adata.com

São Paulo, Brazil
T: +55-19-3199-0886
E: adata_br@adata.com

Manaus, Brazil
T: +55-92-2125-9090
E: adata_br@adata.com



WWW.XPG.COM

Copyright 2026 by ADATA Technology Co., Ltd. All rights reserved.
All brand names are registered trademarks of their respective owners.

Americas

Los Angeles, USA
T: +1-714-332-8708
E: adata_usa@adata.com
E: IASales_us@adata.com

Mexico City, Mexico
T: +52-55-5543-7427
E: mexico@adata.com

Miami, USA
T: +1-786-536-2128
E: adata_latin@adata.com

Santo Antonio de Posse, Brazil
T: +55-19-3199-0886
E: adata_br@adata.com

Europe

Hoofddorp, Netherlands
T: +31-23-5689203
E: adata_europe@adata.com

Munich, Germany
T: +49-899-0405-296
E: IASales_eu@adata.com

Cologne, Germany
T: +49-221-65-080-4093
E: adata_europe@adata.com