



GAME TO THE XTREME

2026 Product Guide





XTREME PERFORMANCE GEAR

At XPG, we don't just craft Xtreme Performance Gear for streamers, Esports athletes, and tech enthusiasts. We also work closely and directly with the community to gain valuable insight into the needs of real users, like you. We strive to create products with the highest standards of stability, reliability, and performance in mind. We deeply value innovation in our approach to design and engineering, which has earned the XPG brand several prestigious international distinctions such as the "iF Design" and "Good Design" awards. We strive to disrupt the status quo of product development by introducing new concepts, materials, and technologies to the industry. In addition to developing award winning products, we play an active role in the gaming community by sponsoring and supporting Esports events, organizations, and teams from around the world. XPG was established in 2008 by ADATA, a world leader in DRAM module manufacturing.

Be a Hero.

However you play, we are with you every step of the way. To cherish your GGs and support you in defeat. Because we are all gamers and this is our lifestyle. So #GAMETOTHEXTREME, and thank you for letting XPG join you on your adventures. We're honored to help you live out your dreams with the absolute best gear crafted on this planet.

Welcome to Team XPG!




CONTENTS

DRAM	05-16
SSD	17-25
PSU	26-42
PC CHASSIS	43-56
COOLING SOLUTIONS	57-66
GAMING GEARS	67-76
PRIME SOFTWARE	77



A Legacy of Excellence

XPG has earned widespread acclaim in the gaming industry, amassing an impressive array of prestigious awards that highlight our steadfast commitment to innovation and quality. Celebrated with honors such as the Red Dot, iF Design, and numerous media awards, we consistently exemplify the pinnacle of excellence. Our dedication to advancing gaming technology ensures the delivery of outstanding performance and sophistication to enthusiasts worldwide.

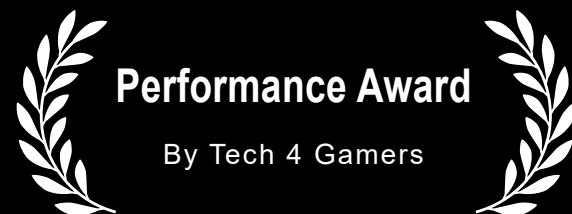

"XPG PRECOG Studio... offers tremendous value... with impressively clean, expansive sound... and great spatial positioning... a great value option for gamers on a budget."



"XPG's Core Reactor II series... offers a balance of performance, quality, and affordability... with efficient thermal management and robust build quality for mid-range builders needing extra power."




"The XPG Fusion Titanium 1600 is a powerhouse, offering exceptional efficiency... for those requiring extreme performance and reliability..."



XPG

DRAM Module



	NOVAKEY RGB DDR5	LANCER CUDIMM RGB	AICORE DDR5 R-DIMM
Memory Type	DDR5	DDR5	DDR5
Form Factor	U-DIMM	CUDIMM	R-DIMM
Color	Black	Silver Grey	Black
Capacity	16GB / 32GB	16GB / 24GB	16GB / 32GB
Speeds	6,000 / 6,400 / 7,200 / 8,000 MT/s	8,400 / 8,800 / 9,200 MT/s	6,400 / 7,200 / 8,000 MT/s
CAS Latencies	30, 32, 34, 38	40, 42	32, 34, 40
Operating Voltage	1.4V-1.45V	1.4V-1.45V	1.4V
Operating Temperature	0°C to 85°C	0°C to 95°C	0°C to 95°C
Dimensions (L x W x H)	133.35 x 45.25 x 8.2mm	133.35 x 43.56 x 8mm	133.35 x 31.25 x 5.57mm
Weight	71.13g	71.13g	19.45g
Warranty	Limited lifetime warranty		

DDR5 DRAM





LANCER NEON RGB		LANCER RGB DDR5	LANCER DDR5
Memory Type	DDR5	DDR5	DDR5
Form Factor	U-DIMM	U-DIMM	U-DIMM
Color	Silver Grey	Black / White	Black / White
Capacity	16GB	16GB / 32GB / 48GB	16GB / 32GB
Speeds	6,000 / 6,400 / 7,200 / 8,000 MT/s	6,000 / 6,400 / 7,200 / 8,000MT/s	6,000 / 6,400 MT/s
CAS Latencies	30, 32, 34, 38	30, 32, 34, 38	30, 32
Operating Voltage	1.4-1.45V	1.35V-1.40V	1.35V-1.4V
Operating Temperature	0°C to 85°C	0°C to 85°C	0°C to 85°C
Dimensions (L x W x H)	133.35 x 45.18 x 8.7mm	133.35 x 43.56 x 8mm	133.35 x 43.56 x 8mm
Weight	55.02g	72.4g	72.4g
Warranty	Limited lifetime warranty		

DDR5 DRAM

ARMAX RGB DDR5		ARMAX DDR5
Memory Type	DDR5	DDR5
Form Factor	U-DIMM	U-DIMM
Color	Black	Black
Capacity	16GB / 32GB	16GB / 32GB
Speeds	5,600 / 6,000 / 6,400 MT/s	5,600 / 6,000 / 6,400 MT/s
CAS Latencies	30, 32, 36, 38, 46	30, 32, 36, 38, 46
Operating Voltage	1.1V-1.4V	1.1V-1.4V
Operating Temperature	0°C to 85°C	0°C to 85°C
Dimensions (L x W x H)	133.35 x 39.5 x 8.5mm	133.35 x 39.49 x 8.5mm
Weight	43.28g / 46.86g	43.16g / 46.74g
Warranty	Limited lifetime warranty	

07

08

DDR5 DRAM




LANCER BLADE RGB DDR5		LANCER BLADE DDR5	
Memory Type	DDR5	DDR5	
Form Factor	U-DIMM	U-DIMM	
Color	Black / White	Black / White	
Capacity	8GB / 16GB / 24GB / 32GB	8GB / 16GB / 24GB / 32GB	
Speeds	5,600 / 6,000 / 6,400 MT/s	5,600 / 6,000 / 6,400 MT/s	
CAS Latencies	28, 30, 32, 34, 36, 38, 46, 48	28, 30, 32, 34, 36, 38, 46, 48	
Operating Voltage	1.1-1.4V	1.1-1.4V	
Operating Temperature	0°C to 85°C	0°C to 85°C	
Dimensions (L x W x H)	133.35 x 40 x 7.86mm	133.35 x 39.5 x 8.5mm	
Weight	41.11g / 44.41g	72.4g	
Warranty	Limited lifetime warranty		

DDR4 DRAM



SPECTRIX D50G		SPECTRIX D45G		SPECTRIX D45	
Memory Type	DDR4	DDR4		DDR4	
Form Factor	U-DIMM	U-DIMM		U-DIMM	
Color	Tungsten Grey	Black / White		White	
Capacity	8GB	8GB / 16GB / 32GB		32GB	
Speeds	3,200 MT/s	3,200 / 3,600 MT/s		3,200 MT/s	
CAS Latencies	16	16, 18		16	
Operating Voltage	1.35V	1.35V		1.35V	
Operating Temperature	0°C to 85°C	0°C to 85°C		0°C to 85°C	
Dimensions (L x W x H)	133.35 x 43.56 x 8mm	133.35 x 45.26 x 8.2mm		133.35 x 39.17 x 8.2mm	
Weight	46g	66g		67g	
Warranty	Limited lifetime warranty				

DDR4 DRAM

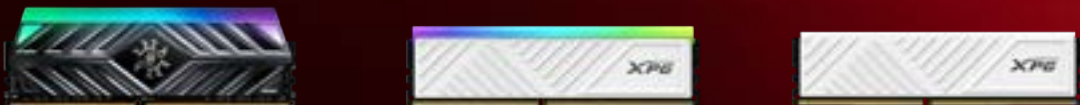


	SPECTRIX D41	GAMMIX D35G	GAMMIX D35
Memory Type	DDDR4	DDR4	DDR4
Form Factor	U-DIMM	U-DIMM	U-DIMM
Color	Tungsten Grey	White	White
Capacity	8GB / 16GB	8GB / 16GB / 32GB	8GB / 16GB / 32GB
Speeds	3200 MT/s	3200 / 3600 MT/s	3200 / 3600 MT/s
CAS Latencies	16	16, 18	16, 18
Operating Voltage	1.2V - 1.35V	1.35V	1.35V
Operating Temperature	0°C to 85°C	0°C to 85°C	0°C to 85°C
Dimensions (L x W x H)	133.3 x 45.8 x 8mm	133.35 x 36 x 6.6mm	133.35 x 34x 5.9mm
Weight	45g	31.6g / 32.43g / 33.09g	27.34g / 28.41g / 29.27g
Warranty	Limited lifetime warranty		

DDR5 DRAM

NOVAKEY RGB DDR5

INFINITE BEYOND VISION



CES
Innovation
Awards
2026
Best of Innovation

TAIWAN
EXCELLENCE 2026

WORLD'S FIRST
INFINITY MIRROR DESIGN

50% RECYCLED ALUMINUM &
85% PCR PLASTIC

CUSTOMIZABLE
RGB LIGHTING

11

12

ARMAX RGB DDR5

FLIGHT TO THE MAX



COMPACT DESIGN
LOW-PROFILE HEATSINK

CUSTOMIZABLE
RGB LIGHTING

**AMD EXPO AND
INTEL® XMP 3.0 READY**

ARMAX DDR5

MAX POWER SOLID STYLE




COMPACT DESIGN
LOW-PROFILE HEATSINK

**AMD EXPO AND
INTEL® XMP 3.0 READY**

PMIC
FOR POWER SUPPLY STABILITY

LANCER CUDIMM RGB

A NEW HORIZON OF SPEED

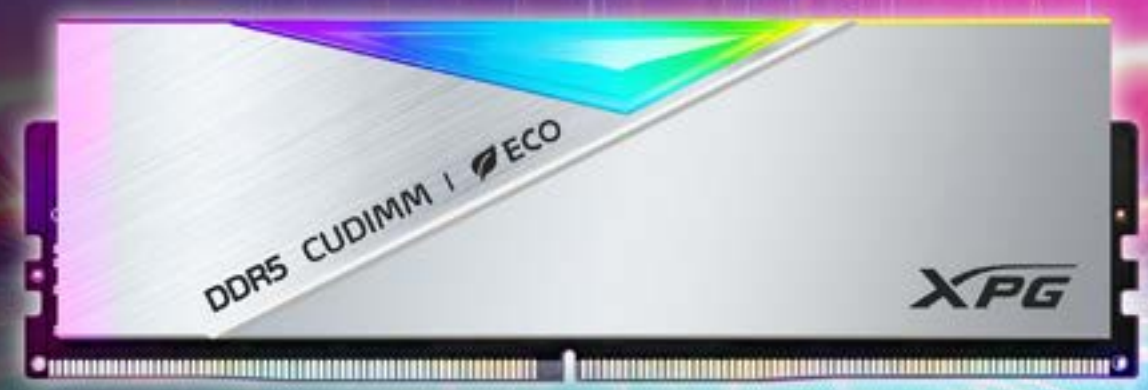

CKD
STABILIZES PERFORMANCE

MADE WITH 80%
RECYCLED ALUMINUM

BUILT-IN POWER
MANAGEMENT IC

REGISTER CLOCK DRIVER
FOR STABILITY

ON-DIE ECC AND
SIDE-BAND ECC

30μ GOLD CONNECTOR
WITH THERMAL SENSOR

AICORE R-DIMM

UNLEASH EXTREME SPEED
FOR A SMART FUTURE



LANCER NEON RGB

ABSOLUTELY ILLUMINATED



30μ GOLD CONNECTOR
WITH THERMAL SENSOR

HEAT-DISSIPATING COATING
WITH IMR PROCESS

INDUSTRY LEADING
60% RGB ILLUMINATION

XPG Solid State Drive





	MARS 980 PRO	MARS 980 BLADE	MARS 970 PLUS
Capacity	1TB / 2TB / 4TB	1TB / 2TB / 4TB	1TB / 2TB
Form Factor	M.2 2280	M.2 2280	M.2 2280
Controller	SM2508	SM2508	-
NAND Flash	3D NAND	3D NAND	3D NAND
Interface	PCIe Gen5 x4	PCIe Gen5 x4	PCIe Gen5 x4
Sequential Read (Max)	Up to 14,000MB/s	Up to 14,000MB/s	Up to 11,000MB/s
Sequential Write (Max)	Up to 13,000MB/s	Up to 13,000MB/s	Up to 10,000MB/s
4KB Random Read IOPS(Max)	2,000K	2,000K	1,600K
4KB Random Write IOPS(Max)	1,650K	1,650K	1,400K
Operating Temperature	0°C - 70°C	0°C - 70°C	0°C - 70°C
Storage Temperature	-40°C - 85°C	-40°C - 85°C	-40°C - 85°C
Shock Resistance	1,500G/0.5ms	1,500G/0.5ms	1,500G/0.5ms
MTBF	2,000,000hours	2,000,000hours	2,000,000hours
Terabytes Written (TBW) (Max Capacity)	2,960TB	2,960TB	1,200TB
Dimensions (L x W x H)	80.5 x 24.2 x 11.2mm 3.17 x 0.95 x 0.44inch	80 x 22 x 4.5mm 3.15 x 0.87 x 0.18inch	80 x 22 x 3.9mm 3.15 x 0.87 x 0.18inch
Weight	30.3g / 1.07oz	12g / 0.42oz	10g / 0.35oz
Warranty	5-year limited warranty		

	SPECTRIX S65G	GAMMIX S55	GAMMIX S70 BLADE	GAMMIX S60
Capacity	500GB / 1,000GB / 2,000GB	512GB / 1TB / 2TB	512GB / 1TB / 2TB / 4TB / 8,000GB	512GB / 1TB / 2TB
Form Factor	M.2 2280	M.2 2230	M.2 2280	M.2 2280
Controller	-	-	IG5236	-
NAND Flash	3D NAND	3D NAND	3D NAND	3D NAND
Interface	PCIe Gen4 x4	PCIe Gen4 x4	PCIe Gen4 x4	PCIe Gen4 x4
Sequential Read (Max)	Up to 6,000MB/s	Up to 5,000MB/s	Up to 7,400MB/s	Up to 5,000MB/s
Sequential Write (Max)	Up to 5,000MB/s	Up to 3,700MB/s	Up to 6,800MB/s	Up to 4,200MB/s
4KB Random Read IOPS(Max)	-	-	Up to 750K	-
4KB Random Write IOPS(Max)	-	-	Up to 750K	-
Operating Temperature	0°C - 70°C	0°C - 70°C	0°C - 70°C	0°C - 70°C
Storage Temperature	-40°C - 85°C	-40°C - 85°C	-40°C - 85°C	-40°C - 85°C
Shock Resistance	1,500G/0.5ms	1,500G/0.5ms	1,500G/0.5ms	1,500G/0.5ms
MTBF	2,000,000hours	1,500,000hours	2,000,000hours	1,500,000hours
Terabytes Written (TBW) (Max Capacity)	640TB	450TB	5,920TB	450TB
Dimensions (L x W x H)	80 x 22 x 7mm 3.15 x 0.87 x 0.27inch	30 x 22 x 2.05mm 1.18 x 0.87 x 0.08inch	80 x 22 x 4.3mm 3.15 x 0.87 x 0.17inch	80 x 22 x 3.13mm 3.15 x 0.87 x 0.13inch
Weight	14.6g / 0.51oz	2.7g / 0.09oz	11g / 0.39oz	11g / 0.39oz
Warranty	5-year limited warranty			

MARS 980 PRO

Fast Moves, Stay Cool



LEGENDARY SPEED
14,000 / 13,000 MB/S

**ACTIVE
AIR-COOLING SYSTEM**

15% LOWER TEMPS
COMPARED TO FANLESS HEATSINK

LAPTOP READY
PCIe 5.0 GAMING SSD

MARS 980 BLADE

Bladefast.
Sharp Unstoppable.



LEGENDARY SPEED
14,000 / 13,000 MB/S

**TSMC
6nm PROCESS**



SSD

MARS 970 PLUS

TOO FAST TO FIGHT BACK



SSD

SPECTRIX S65G

RGB ONLY. NO COMPROMISE.

LAPTOP READY
PCIe 5.0 GAMING SSD

LEGENDARY SPEED
11,000 / 10,000MB/S

SUPERIOR
PERFORMANCE-TO-POWER EFFICIENCY

FASTEST
Gen4 RGB SSD

X-SHAPED
BRAND SPIRIT

BLAZING SPEEDS
6,000 / 5,000MB/S

GAMMIX S55

POWERING IN YOUR HANDHELD



HIGH SPEEDS

5,000 / 3,700MB/S (PC / LAPTOP)

EXPANDED STORAGE

FOR HANDHELDS

COMPATIBLE WITH

MINI LAPTOPS



Power Supply Units



80 PLUS Certified Efficiency

All XPG power supplies meet the stringent standards of 80 PLUS certification, ensuring high energy efficiency and reduced power waste. With less heat generated and lower electricity consumption, users can enjoy reliable performance and long-term energy savings.




Cybenetics Certification

XPG power supplies are also certified by Cybenetics, which provides data-driven evaluations based on real-world conditions. This certification offers clear insights into energy efficiency and acoustic performance through rigorous and transparent testing.



Next-Gen Compatibility

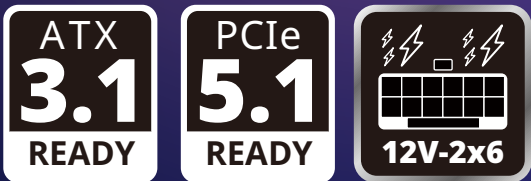

XPG power supplies are ATX 3.1 ready, support the latest 12V-2x6 connector, and meet PCIe 5.1 standards—delivering stable and efficient power for next-generation components. Designed to align with the latest platform requirements, they ensure long-term reliability and system readiness.

235% Power Excursion

All XPG ATX 3.1 power supplies are designed to support up to 235% power excursion, enabling the system to handle sudden power spikes, ensuring stability, and preventing crashes during intense workloads like gaming, rendering, and data processing.

Reliable Safety Protection

XPG power supplies are equipped with protection mechanisms to ensure system safety and reliability. Most models include 8 protection features that work together to safeguard against power-related issues, ensuring stable performance and long-term durability.

OVP Over Voltage Protection	UVP Under Voltage Protection	OCP Over Current Protection	OPP Over Power Protection	SCP Short Circuit Protection	OTP Over Temperature Protection	NLO No Load Operation Protection	SIP Surge and Inrush Protection
---------------------------------------	--	---------------------------------------	-------------------------------------	--	---	--	---



	FUSION	CYBERCORE II	PYMCORE SFX
Power Watt	1600W	1300W	850W / 750W
80 PLUS Rating	TITANIUM	PLATINUM	GOLD
Cybenetics	TITANIUM	PLATINUM	PLATINUM
Modular	Fully-Modular	Fully-Modular	Fully-Modular
Dimensions	210 x 150 x 86mm	160 x 150 x 86mm	125 x 100 x 63.5mm
ATX Version	ATX 3.1	ATX 3.1	ATX 3.1
Connector			
ATX 24 Pin Connector	1	1	1
EPS 8 Pin Connector	2	2	2
12V-2x6 Connector (600W)	2	1	1
PCI-E 6+2	10	10	3
SATA Connector	12	12	6
Molex 4 Pin Connector	4	8	2
Floppy 4 Pin	2	2	-
OC Link	1	-	-
PRIME Port	1	-	-
Input			
Voltage	100-240V		
Frequency	47-63 Hz	50-60Hz	50-60Hz
Current	15A	15A	10A
Fan			
Fan Size	135mm	120mm	92mm
Fan Bearing	Double Ball Bearing	Double Ball Bearing	FDB
Protections	OCP / OVP / UVP / OPP / SCP / OTP / NLO / SIP		
Warranty	12 Years	10 Years	7 Years

	CORE REACTOR II			
Power Watt	1000W	850W	750W	650W
80 PLUS Rating	GOLD			
Cybenetics	PLATINUM			
Modular	Fully-Modular			
Dimensions	140 x 150 x 86mm			
ATX Version	ATX 3.1			
Connector				
ATX 24 Pin Connector	1	1	1	1
EPS 8 Pin Connector	2	2	2	2
12V-2x6 Connector (600W)	1	1	1	1
PCI-E 6+2	8	6	6	4
SATA Connector	9	8	8	8
Molex 4 Pin Connector	3	4	4	4
Floppy 4 Pin	-	-	-	-
OC Link	-	-	-	-
PRIME Port	-	-	-	-
Input				
Voltage	100-240V			
Frequency	50-60 Hz			
Current	13A	12A	10A	12A
Fan				
Fan Size	135mm	120mm		
Fan Bearing	FDB			
Protections	OCP / OVP / UVP / OPP / SCP / OTP / NLO / SIP			
Warranty	10 Years			





CORE REACTOR II VE				KYBER II	KYBER	
Power Watt	850W	750W	650W	850W / 750W / 650W	850W	750W / 650W
80 PLUS Rating	GOLD			GOLD	GOLD	
Cybenetics	GOLD			GOLD	PLATINUM	GOLD
Modular	Fully-Modular			Semi-Modular	Non-Modular	
Dimensions	140 x 150 x 86mm			150 x 86 x 150 mm	140 x 150 x 86 mm	
ATX Version	ATX 3.1			ATX 3.1	ATX 3.1	ATX 2.52
Connector						
ATX 24 Pin Connector	1	1	1	1	1	1
EPS 8 Pin Connector	2	2	2	2	2	2
12V-2x6 Connector (600W)	1	1	1	1	1	-
PCI-E 6+2	3	3	2	2	2	2
SATA Connector	6	6	6	6	6	6
Molex 4 Pin Connector	2	2	2	2	2	2
Floppy 4 Pin	-	-	-	-	-	-
OC Link	-	-	-	-	-	-
PRIME Port	-	-	-	-	-	-
Input						
Voltage	100-240V					
Frequency	47-63Hz			47 - 63Hz	47 - 63Hz	
Current	12A	10A	10A	10A*	12A	10A
Fan						
Fan Size	120mm			135mm	120mm	
Fan Bearing	FDB			FDB	FDB	
Protections	OCP / OVP / UVP / OPP / SCP / OTP / NLO / SIP					
Warranty	7 Years			5 Years	5 Years	

*6A (only for Argentina)

PYLON II			PROBE
Power Watt	750W / 650W	550W	700W / 600W
80 PLUS Rating	BRONZE		BRONZE
Cybenetics	Silver		-
Modular	Non-Modular		Non-Modular
Dimensions	150 x 150 x 86mm		140 x 150 x 86mm
ATX Version	ATX 3.1		ATX 2.52
Connector			
ATX 24 Pin Connector	1	1	1
EPS 8 Pin Connector	2	2	2
12V-2x6 Connector (450W)	1	-	-
12V-2x6 Connector (300W)	-	1	-
PCI-E 6+2	2	2	2
SATA Connector	6	6	5
Molex 4 Pin Connector	2	2	2
Floppy 4 Pin	-	-	-
OC Link	-	-	-
Input			
Voltage	100-240V		
Frequency	50 - 60Hz		47 - 63Hz
Current	10A	8A	9A - 10A
Fan			
Fan Size	135mm		120mm
Fan Bearing	FDB		Sleeve-Bearing Fan
Protections	OCP / OVP / UVP / OPP SCP / OTP / NLO / SIP		OVP / OPP / SCP / UVP OTP / SIP
Warranty	5 Years		3 Years



FUSION 1600 TITANIUM

POWER SUPERMACY

Born from years of close collaboration with Delta Electronics



XPG FUSION blends patented innovations for Titanium-grade efficiency and next-gen reliability.



World's First ATX Patented Planar Transformer by DELTA

Originally developed for military and aerospace, DELTA's patented Planar Transformer is now optimized for high-performance computing—offering 75% smaller components, lower thermal output, and improved efficiency for compact, sustainable power delivery.

Full Digital Control, Fully Modular Power

XPG FUSION stands out with its fully digital, modular design—delivering precise monitoring and control through the XPG PRIME ecosystem, unlike semi-digital alternatives



Real-Time Power Tuning & Troubleshooting



Customized Power Setting



Adjustable Fan-Curve



History Log

Applications



Lightshow Creation

Creative studios using high-performance workstations for landscape lightshow production.

Data Analysis

Advanced computing for forensic labs and medical data analysis.



Architecture & Engineering

Powerful workstations designed to meet high-wattage demands for CAD, modeling, and simulation.



Simulators

Custom-built workstations for remote control and simulation systems.



CYBERCORE II PLATINUM

BETTER THAN ULTIMATE



CYBENETICS PLATINUM
CERTIFIED

ATX 3.1 READY
12V-2X6 CONNECTOR

XPG VENTO PRO
120 PWM

CORE REACTOR II

IMPROVE YOUR CORE,
ENHANCE YOUR PERFORMANCE




PLATINUM CYBENETICS
CERTIFIED

ATX 3.1 READY
12V-2X6 CONNECTOR

FULLY MODULAR DESIGN

CORE REACTOR II VE

IMPROVE YOUR CORE,
ENHANCE YOUR PERFORMANCE

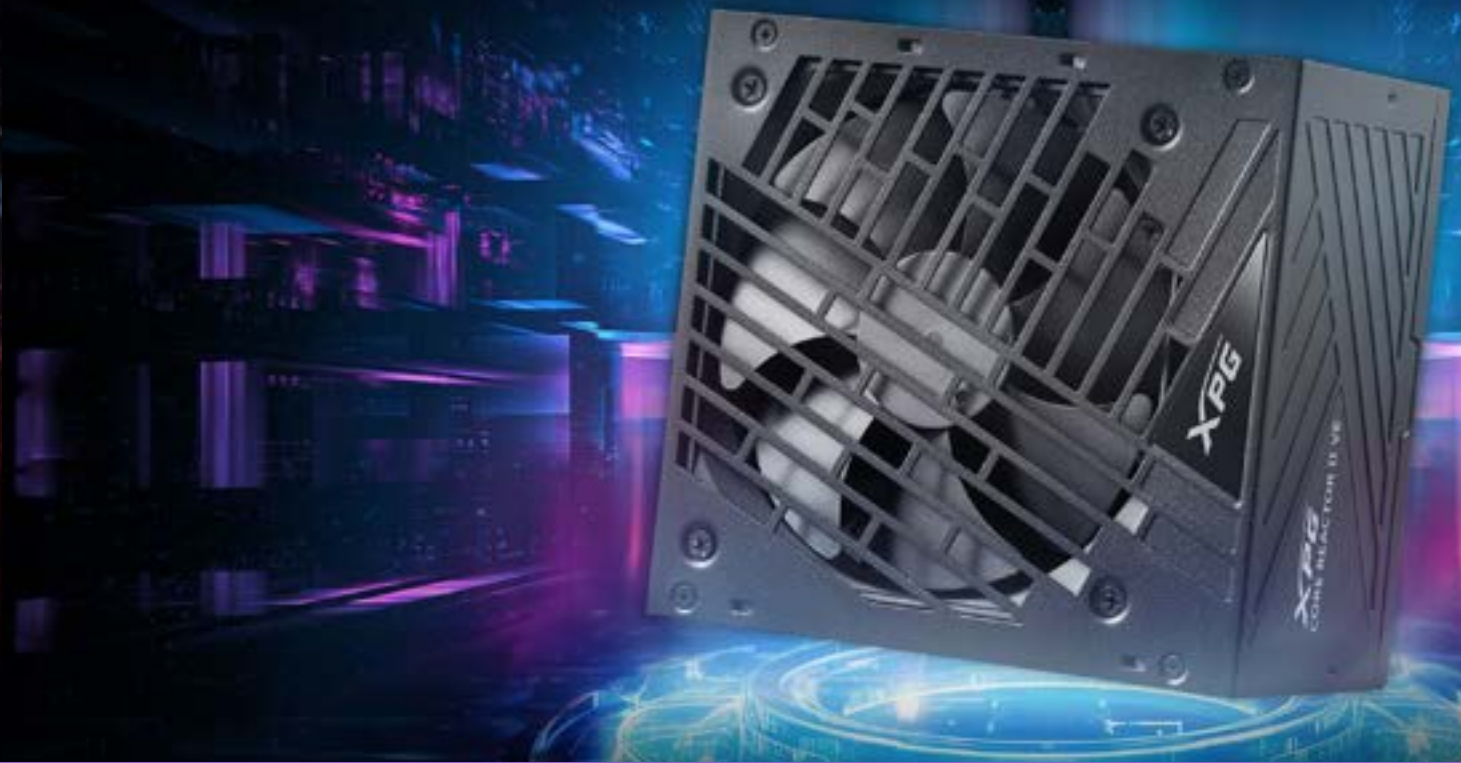

GOLD CYBENETICS
CERTIFIED

ATX 3.1 READY
12V-2X6 CONNECTOR

LOW RIPPLE NOISE DESIGN

PYMCORE SFX

UNDERSIZED. OVERPOWERED.



KYBER II

FORGE THE POWER



COMPACT SFX SIZE

HIGH-DUTY
CAPACITOR ARRAY

ATX 3.1 READY
12V-2X6 CONNECTOR

JAPANESE 105°C
MAIN CAPACITOR

QUIET 135MM FDB FAN

ATX 3.1 READY
12V-2X6 CONNECTOR

PYLON II

UNLEASH THE SURGE



SILVER CYBENETICS
CERTIFIED

ATX 3.1 READY
12V-2X6 CONNECTOR

135MM
FDB FAN

80 PLUS BRONZE
EFFICIENCY

ATX V2.52 STANDARDS
COMPLIANCE

COMPACT 140MM LENGTH
FOR EASY INSTALLATION

PROBE

VIABLE, APPLIABLE, &
RELIABLE



XPG

PC Chassis



Magnetic Front Panel – Fast, Tool-Free Access

XPG's magnetic front panel makes upgrades and maintenance effortless and tool-free. With a quick snap-on and snap-off design, easy access is provided for cleaning, cooling adjustments, or adding new components. The clean, streamlined look enhances both the functionality and aesthetics of the rig.

Reverse-Connector Motherboard Compatibility Flexible Build Options

XPG cases now feature Reverse-Connector Motherboard Compatibility, providing greater flexibility in build configurations. This design optimizes airflow and improves cable management, allowing for a more efficient and high-performance setup.



Built for durability and aesthetics, XPG's Exoskeleton Design reinforces the case structure while enhancing airflow and showcasing internal components. This rugged yet refined framework ensures stability for high-performance builds, making every rig look and feel battle-ready.

INVADER X SERIES



INVADER X MINI		INVADER X BTF	INVADER X
Dimension	460 x 210 x 359mm	485 x 245 x 448mm	475 x 245 x 448mm
Color	Black / White	Black	Black
Material	SPCC / 4mm Tempered Glass	SPCC / 3mm Tempered Glass	SPCC / 3mm Tempered Glass
Form Factor	ATX, Micro-ATX, Mini-ITX	ATX, Micro-ATX, Mini-ITX ATX, Micro-ATX (Reverse-Connector Motherboards)	ATX, Micro-ATX, Mini-ITX Micro-ATX (Reverse-Connector Motherboards)
Expansion Slots	7	7 or 4 Vertical	7 or 4 Vertical
Drive Bays	2 x 2.5", 1 x 3.5" 1 x 2.5" / 3.5"	3 x 3.5" / 2.5"	3 x 3.5" / 2.5"
I/O Port	USB 3.2 Type C x1 USB 3.2 Type A x1 Hybrid Audio Jack x1	USB 3.2 Type C x1 USB 3.2 Type A x2 Hybrid Audio Jack x1	USB 3.2 Type C x1 USB 3.2 Type A x2 Hybrid Audio Jack x1
Fan Included	5 x 120mm ARGB	5 x 120mm ARGB Fans	5 x 120mm ARGB Fans
Fan Support	Rear: 120mm x 1 Top: 120mm x 2 / 140mm x 2 PSU Shroud: 120mm x 2	Rear: 120mm x 1 / 140mm x 1 Top: 120mm x 3 / 140mm x 2 Side: 120mm x 3 Bottom: 120mm x 1 / 140mm x 1 PSU Shroud :120mm x 2	Rear: 120mm x 1 / 140mm x 1 Top: 120mm x 3 / 140mm x 2 Side: 120mm x 3 Bottom: 120mm x 1 / 140mm x 1 PSU Shroud :120mm x 2
Radiator Support	Rear: 120mm Top: 240mm	Rear: 120mm Top: 360mm / 240mm / 120mm Side: 360mm / 240mm / 120mm	Rear: 120mm Top: 360mm / 240mm / 120mm Side: 360mm / 240mm / 120mm
GPU Length Support	Up to 330mm	Up to 400mm	Up to 400mm
Air Cooler Height Support	Up to 166mm	Up to 175mm	Up to 175mm
PSU Length Support	Up to 180mm	Up to 240mm	Up to 240mm

*Power/reset buttons standard on all chassis.


STARKER SERIES



STARKER AIR BTF	
Dimension	496 x 242 x 464mm
Color	Black / White
Material	SPCC / 3mm Tempered Glass
Form Factor	ATX, Micro-ATX, Mini-ITX, ATX, Micro-ATX (Reverse-Connector Motherboards)
Expansion Slots	7 or 4 Vertical
Drive Bays	2 x 2.5" / 3.5" 2 x 2.5", 1 x 3.5" (with E-ATX Bracket)
I/O Port	USB 3.2 Type C x1 USB 3.2 Type A x2 Hybrid Audio Jack x1 LED Button x1
Fan Included	4 x 120mm ARGB Fans
Fan Support	Front: 120mm x 3 / 140mm x 3 Top: 120mm x 3 / 140mm x 2 Rear: 120mm x 1 / 140mm x 1 PSU Shroud: 120mm x 3 Side: 120mm x 2 (with E-ATX bracket removed)
Radiator Support	Front: 360 / 280 / 240 / 120mm Top: 360 / 280 / 240 / 120mm Rear: 140 / 120mm
GPU Length Support	Up to 390mm
Air Cooler Height Support	Up to 180mm
PSU Length Support	Up to 220mm

*Power/reset buttons standard on all chassis.

VALOR SERIES



	VALOR AIR PRO	VALOR AIR NANO	VALOR MESH NANO
Dimension	490 x 215 x 467mm	357 x 220 x 436 mm	357 x 220 x 436 mm
Color	Black / White	Black / White	Black / White
Material	SPCC / 4mm Tempered Glass	SPCC	SPCC
Form Factor	E-ATX, ATX, Micro-ATX, Mini-ITX	Micro-ATX, Mini-ITX	Micro-ATX, Mini-ITX
Expansion Slots	7	5	5
Drive Bays	2x 2.5" 2x 2.5" / 3.5"	2x 2.5" 1x 3.5"	2x 2.5" 1x 3.5"
I/O Port	USB 3.2 Type C x1 USB 3.2 Type A x2 Hybrid Audio Jack x1	USB 3.2 Type C x1 USB 3.2 Type A x2 Hybrid Audio Jack x1	USB 3.2 Type C x1 USB 3.2 Type A x2 Hybrid Audio Jack x1
Fan Included	4 x 120mm ARGB Fan	1 x 120mm ARGB Fan	1 x 120mm ARGB Fan
Fan Support	Front: 120mm x 3 / 140mm x 3 Top: 120mm x 3 / 140mm x 2 Rear: 120mm x 1 Side: 120mm x2 (ATX, m-ATX, ITX only)	Top: 120 mm x3 / 140 mm x2 Rear: 120 mm x1 Bottom: 120 mm x2	Top: 120 mm x3 / 140 mm x2 Rear: 120 mm x1 Bottom: 120 mm x2
Radiator Support	Top: 360mm / 280mm / 240mm Front: 360mm / 280mm / 240mm Rear: 120mm	Top: 360mm / 240mm Rear: 120mm	Top: 360mm / 240mm Rear: 120mm
GPU Length Support	Up to 400mm	Up to 370mm	Up to 370mm
Air Cooler Height Support	Up to 167mm	Up to 170mm	Up to 170mm
PSU Length Support	Up to 200mm	Up to 170mm	Up to 170mm

VALOR SERIES



	VALOR AIR PLUS	VALOR MESH	VALOR AIR
Dimension	482 x 200 x 400mm	460 x 210 x 371 mm	460 x 210 x 371 mm
Color	Black / White	Black / White	Black / White
Material	SPCC / 3mm Tempered Glass	SPCC / 3mm Tempered Glass	SPCC / 3mm Tempered Glass
Form Factor	ATX, Micro-ATX, Mini-ITX	ATX, Micro-ATX, Mini-ITX	ATX, Micro-ATX, Mini-ITX
Expansion Slots	7	7	7
Drive Bays	2x 2.5", 1x 3.5" 1x 2.5" / 3.5"	2x 2.5", 1x 3.5" 1x 2.5 / 3.5"	2x 2.5", 1x 3.5" 1x 2.5 / 3.5"
I/O Port	USB 3.2 Type A x2 Hybrid Audio Jack x1	USB 3.2 Type A x2 Hybrid Audio Jack x1	USB 3.2 Type A x2 Hybrid Audio Jack x1
Fan Included	4 x 120mm ARGB Fans	4x 120mm Fans	4x 120mm Fans
Fan Support	Front: 120mm x3 Top: 120mm x2 Rear: 120mm x1	Front: 120mm x3 / 140mm x2 Top: 120mm x2 / 140mm x2 Rear: 120mm x1	Front: 120mm x3 / 140mm x2 Top: 120mm x2 / 140mm x2 Rear: 120mm x1
Radiator Support	Front: 360 / 240mm Top: 240mm Rear: 120mm	Front: 360 / 280 / 240mm Top: 240mm Rear: 120mm	Front: 360 / 280 / 240mm Top: 240mm Rear: 120mm
GPU Length Support	Up to 340mm (with pre-installed fans)	Up to 335mm	Up to 335mm
Air Cooler Height Support	Up to 160mm	Up to 166mm	Up to 166mm
PSU Length Support	Up to 170mm	Up to 180mm	Up to 180mm

LANDER SERIES



	LANDER 300	LANDER 500	LANDER 501
Dimension	431 x 242 x 456mm	450 x 200 x 405mm	490 x 215 x 467mm
Color	Black / White	Black	Black
Material	SPCC / 3mm Tempered Glass	SPCC / 3mm Tempered Glass	SPCC / 4mm Tempered Glass
Form Factor	Micro-ATX, Mini-ITX Micro-ATX (Reverse-Connector Motherboards)	ATX, Micro-ATX, Mini-ITX	E-ATX, ATX, Micro-ATX, Mini-ITX
Expansion Slots	5	7	7
Drive Bays	2x 2.5" / 3.5"	2x 2.5" 2x 3.5"	2x 2.5" 2x 2.5" / 3.5"
I/O Port	USB 3.2 Type A x2 Hybrid Audio Jack x1	USB 3.2 Type A x2 Hybrid Audio Jack x1	USB 3.2 Type C x1 USB 3.2 Type A x2 Microphone Jack x1 Headphone Jack x1
Fan Included	4 x 120mm ARGB Fan	4 x 120mm ARGB Fan	4 x 120mm ARGB Fan
Fan Support	Front: 120mm x 3 / 140mm x 2 Top: 120mm x 3 / 140mm x 2 Rear: 120mm x 1 / 140mm x 1 Side: 120mm x 2 PSU Shroud: 120mm x 3	Front: 120mm x3 / 140mm x2 Top: 120 mm x2 Rear: 120 mm x1	Front: 120mm x 3 / 140mm x 3 Top: 120mm x 3 / 140mm x 2 Rear: 120mm x 1
Radiator Support	Top: 360 / 280 / 240mm Rear: 120 / 140mm Side: 240mm	Front: 360mm / 240mm Rear: 120mm	Top: 360mm / 280mm / 240mm Front: 360mm / 280mm / 240mm Rear: 120mm
GPU Length Support	Up to 390mm	Up to 340mm	Up to 400mm
Air Cooler Height Support	Up to 180mm	Up to 160mm	Up to 167mm
PSU Length Support	Up to 200mm	Up to 170mm	Up to 200mm

*Power/reset buttons standard on all chassis.

INVADER X MINI

MINI CASE, MAX VIEW



COMPACT DIMENSIONS

PANAROMIC VIEW CASE

SUPPORTS
UP TO
ATX MOTHERBOARDS

INVADER X BTF

BUILT FOR THE FUTURE



SUPPORTS
REVERSE-CONNECTOR
MOTHERBOARDS

SUPPORTS
UP TO
ATX MOTHERBOARDS

SUPPORTS
VERTICAL OR HORIZONTAL
GPU INSTALLATION

STARKER AIR BTF

STYLE. AIRFLOW. PERFORMANCE.



PREMIUM RGB-ILLUMINATED
STEEL MAGNETIC FRONT PANEL

SUPPORTS UP TO
12X 120MM FANS

SUPPORTS
REVERSE-CONNECTOR
MOTHERBOARDS

VALOR AIR PRO

ENDLESS POSSIBILITIES



SUPPORTS UP TO
9 FANS AND 360 MM RADIATORS

COMPATIBLE WITH E-ATX
MOTHERBOARDS

MAGNETIC FRONT PANEL
& DUST FILTERS
FOR EASY CLEANING

VALOR AIR PLUS

ENDLESS POSSIBILITIES



HIGH-AIRFLOW
MAGNETIC FRONT PANEL

SUPPORTS UP TO
ATX MOTHERBOARDS

GRAPHICS CARDS SUPPORT
UP TO 340MM LONG

VALOR MESH NANO

BREATHE BOLD, MESH FIERCE



SUPPORTS UP TO
370MM LONG GPU
GEFORCE RTX 50 GPU READY

READY FOR
360MM RADIATOR

BUILT-IN TOOL-FREE
MESH PANELS

VALOR AIR NANO

SLASH HEAT, STEAL LOOKS



SUPPORTS UP TO
370MM LONG GPU
GEFORCE RTX 50 GPU READY

READY FOR
360MM RADIATOR

5 DUST FILTERS
WITH SLASH-STYLE
TOOL FREE PANEL

XPG COOLING SOLUTIONS



Next-Gen Cooling: Stay Cool, Stay Ahead

XPG brings cutting-edge thermal tech to our cooling solutions, delivering efficient heat dissipation, quiet operation, and reliable performance for high-demand systems.



Dual-Chamber Pump Innovation

XPG's latest All-in-One Liquid Cooler features Dual-Chamber Pump Technology, leading to exceptional cooling performance. This innovative design ensures precise liquid separation for enhanced heat exchange, while its advanced three-phase motor reduces vibrations, providing quieter operation and extended durability.

Magnetic Fans with Manual Direction Control

XPG's newest magnetic-connection fan design ensures effortless installation, while the innovative manual switch lets users switch fan direction with a simple press—no software needed.





HURRICANE MAG 120 ARGB PWM		HURRICANE 120 ARGB PWM
Color	Black / White	Black / White
Connector Type	4-Pin PWM	4-Pin PWM
Dimensions	120 x 120 x 25mm	120 x 120 x 25mm
Fan Speed	2000 RPM	600 ~ 2000 RPM ± 10%
Max Satic Pressure	Standard: 2.74mm-H ₂ O Reverse: 3.29mm-H ₂ O	1.42mm H ₂ O ±10%
Max Air Flow	Standard: 54.82 ± 10% CFM Reverse: 49.27 ± 10% CFM	61.5 CFM ±10%
Average Noise Level	Standard: 23.3 dBA Reverse: 31.3 dBA	20 dBA
Fan Rated Current	0.2A (Max)	0.2A (Max)
Fan Rated Voltage	DC 12V	DC 12V
Fan Starting Voltage	DC 7V	DC 3.5V
Fan Operating Voltage	DC 5V ~ 12.6V	DC 3.5V~12.6V
Fan Power Dissipation	2.4W	2.4W
Bearing Type	Rifle Bearing	Fluid Dynamic Bearing


VENTO 120 ARGB PWM		VENTO R 120 ARGB PWM	VENTO PRO 120 PWM
Color	Black / White	Black / White	Black
Connector Type	4-Pin PWM	4-Pin PWM	4-Pin PWM
Dimensions	120 x 120 x 25mm	120 x 120 x 25mm	120 x 120 x 25mm
Fan Speed	300~1850 ± 200 RPM	300~1600 RPM ± 10%	DC Mode:450~2150 RPM±10%
Max Satic Pressure	1.5mm H ₂ O ±10%	1.65mm H ₂ O ±10%	3.15 mm H ₂ O
Max Air Flow	50 CFM	65 CFM	75 CFM
Average Noise Level	29 dBA	25.7 dBA	28 dBA
Fan Rated Current	0.2A (Max)	0.2A (Max)	0.16A (Max)
Fan Rated Voltage	DC 12V	DC 12V	DC 12V
Fan Starting Voltage	DC 5V	DC 5V	DC 5V
Fan Operating Voltage	DC 5V~12.6V	DC 5V~12.6V	DC 5V~13.2V
Fan Power Dissipation	2.4W	2.4W	1.56W
Bearing Type	Rifle Bearing	Rifle Bearing	Dual Bearings

All-in-one Liquid Cooler



LEVANTE II 360		LEVANTE II 240	
Color	Black / White	Black / White	Black / White
Pump & Block			
Water Block Dimension (H*W*D)	67 x 62.5 x 50.2 mm	67 x 62.5 x 50.2 mm	67 x 62.5 x 50.2 mm
Water Block Material	Copper	Copper	Copper
Control Mode	PWM (4-Pin)	PWM (4-Pin)	PWM (4-Pin)
Application			
Intel Socket	LGA 1851, 1700, 1200, 115x	LGA 1851, 1700, 1200, 115x	LGA 1851, 1700, 1200, 115x
AMD Socket	AM5, AM4	AM5, AM4	AM5, AM4
Radiator			
Radiator Dimension	396 x 120 x 27 mm	276 x 120 x 27 mm	276 x 120 x 27 mm
Radiator Material	Aluminum	Aluminum	Aluminum
Tube	Sleeved Rubber Tube	Sleeved Rubber Tube	Sleeved Rubber Tube
Fan			
Fan Dimension	360 x 120 x 27 mm	240 x 120 x 27 mm	240 x 120 x 27 mm
Bearing Type	Hydraulic Bearing	Hydraulic Bearing	Hydraulic Bearing
Fan Speed	800-2,000 RPM $\pm 10\%$	600-2,000 RPM $\pm 10\%$	600-2,000 RPM $\pm 10\%$
Fan Static Pressure	2.04 mm-H ₂ O	2.04 mm-H ₂ O	2.04 mm-H ₂ O
Fan Air Flow	58.91 CFM	58.91 CFM	58.91 CFM
Average Noise Level	29.33 dBA / 19.78 dBA per fan	26.7 dBA / 19.78 dBA per fan	26.7 dBA / 19.78 dBA per fan

CPU Air Cooler

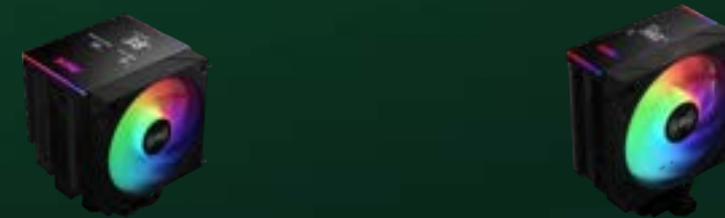

MAESTRO PLUS 62DA		MAESTRO PLUS 42SA	
Color	Black	Black	Black
Dimensions	120 x 160 x 126mm	120 x 156 x 71mm	120 x 156 x 71mm
Heat Pipes	6pcs	4pcs	4pcs
Cooling Capacity	250W	220W	220W
Connector	4-pin PWM	4-pin PWM	4-pin PWM
	3-pin 5V ARGB	3-pin 5V ARGB	3-pin 5V ARGB
	9-pin USB	9-pin USB	9-pin USB
Application			
Intel Socket	LGA 1851, 1700, 1200, 115x	LGA 1851, 1700, 1200, 115x	LGA 1851, 1700, 1200, 115x
AMD Socket	AM5, AM4, AM3	AM5, AM4, AM3	AM5, AM4, AM3
Fan			
Fan Dimensions	120 x 120 x 25mm	120 x 120 x 25mm	120 x 120 x 25mm
Bearing Type	Fluid Dynamic Bearing	Fluid Dynamic Bearing	Fluid Dynamic Bearing
Fan Speed	800-1,800 RPM $\pm 10\%$	800-1,800 RPM $\pm 10\%$	800-1,800 RPM $\pm 10\%$
Fan Static Pressure	1.83mm-H ₂ O	1.83mm-H ₂ O	1.83mm-H ₂ O
Fan Air Flow	70.81 CFM (Max.)	70.81 CFM (Max.)	70.81 CFM (Max.)
Average Noise Level	21.44 dBA	21.44 dBA	21.44 dBA
Fan Power Consumption	≤ 3 W	≤ 3 W	≤ 3 W
MTTF	70,000 Hours (at 25°C)	70,000 Hours (at 25°C)	70,000 Hours (at 25°C)

HURRICANE MAG

CLICK ON, COOL ON.



MAGNETIC
CONNECTOR DESIGN

MANUAL FAN
DIRECTION CONTROL

PATENTED DUAL-SPIN
BLADE DESIGN

LEVANTE II 360/240

COOLING WITHOUT BOUNDARIES



INFINITY MIRROR DESIGN

DUAL-CHAMBER DESIGN
SUPPORTS UP TO 320W TDP

PRE-INSTALLED
ARGB PWM FANS

MAESTRO PLUS 62DA

BE COOL. GO DIGIT.



REAL-TIME DIGITAL
STATUS PANEL

SUPERIOR DUAL TOWER
DESIGN

NEXT-GEN 250W COOLING
CAPACITY

MAESTRO PLUS 42SA

BE COOL. GO DIGIT.



REAL-TIME DIGITAL
STATUS PANEL

COMPACT SINGLE TOWER
DESIGN

FULL PERFORMANCE 220W
COOLING CAPACITY



GAMING CHAIR



	NEXUS PLUS	NEXUS
Color	Black / Black and Red	Black / Black and Red
Seat Cover Material	Leatherette	Fabric (Water-Repellent)
Five-Star Base	Steel Base	Steel Base
Wheel Size	75mm PU Wheel	65mm PU Wheel
Headrest Pillow	Yes	Yes
Lumbar Support	Dynamic Lumbar Support System	Built-in Lumbar Curve Support
Adjustable Back Angle	90° - 155°	90° - 155°
Foam Type	High Density Modelling Foam	High Density Modelling Foam
Adjustable Armrests	4D	2D
Tilt Mechanism	Deer Mechanism	Butterfly Mechanism
Gas Lift Piston	Class-4	Class-4
Seat Back Style	High-back	High-back
Max Weight Capacity	125 kg	125 kg
Backrest Length	87cm	83cm
Backrest Width	57cm	51cm
Seatbase Width	57cm	51cm
Seat Depth	57cm	45.5cm
Armrest to Armrest	75cm	66cm
Floor to Seatbase	49-57cm	48.5-54.5cm
Wheelbase Diameter	66cm	71.5 cm

HEADSET



PRECOG STUDIO

Connector	4.4mm Audio Jack 3.5 mm Microphone Jack USB-C DAC USB-C to A Adatpter
Driver Size	50mm
Frequency Response	20~20,000Hz
Sensitivity	101dB±3dB
Mic Directivity	Omnidirectional
Size (LxWxH)	216x192x91mm

DAC

Size	50mm x 27mm x 13mm
DAC Chip	ESS Chip
Audio Format	Up to 32bits/96kHz
Input	USB-Type C
Output	4.4mm Audio Port 3.5mm Microphone Port

KEYBOARD



SORCERER

Mounting Style	Gasket Mount
Weight	730g
Dimensions	388x137x41mm
Key Switch	XPG Red Mechanical Switch
Lighting Effect	Per-Key RGB 10 Preset Lighting Effects
Number of keys	97 Keys (ANSI) / 98 Keys (ISO)
Interface	USB Type C
PRIME Software Support	Yes

SORCERER MINI

Mounting Style	Gasket Mount
Weight	530g
Dimensions	324 x 115 x 41 mm
Key Switch	XPG Red Mechanical Switch
Lighting Effect	Per-Key RGB 10 Preset Lighting Effects
Number of keys	66 Keys (ANSI) / 67 Keys (ISO)
Interface	USB Type C
PRIME Software Support	Yes

MOUSE PAD



FRONTLINE II XL

Color	Black
Material	Microfiber
WxLxD	900 x 400 x 3mm

FRONTLINE XL
SAGA SERIES (2025)

Color	SAGA 03 / SAGA 04
Material	Microfiber
WxLxD	900 x 400 x 3mm

NEXUS

PLUSH FABRIC, GAME-ON COMFORT!



BUILT-IN LUMBAR
CURVE SUPPORT

SOFT,
WATER-REPELLENT FABRIC

RECLINES
FROM 90° TO 155°

NEXUS PLUS

PREMIUM COMFORT, PRO-LEVEL PERFORMANCE.



DYNAMIC LUMBAR
SUPPORT SYSTEM

4D ADJUSTABLE
ARMRESTS

PREMIUM
LEATHERETTE FINISH

FRONTLINE XL

2025 SERIES



PRECISE CONTROL
MICROFIBER SURFACE

900 X 400 (MM)
LARGE SURFACE AREA

STABLE GRIP
ANTI-SLIP RUBBER BASE

PRECOG STUDIO

IMMERSE | AMPLIFY | SLAY



THE WORLD'S FIRST
BALANCED GAMING HEADSET

4.4MM CONNECTOR
ZERO-CROSSTALK CIRCUIT DESIGN

USB-C DAC
SUPERIOR ESS AUDIO CHIPSET

SORCERER

SPELL IT OUT



GASKET MOUNT DESIGN
TRIPLE-LAYERED DAMPENING FOAM

XPG RED SWITCH
SMOOTH TYPING EXPERIENCE

96% FORM FACTOR
COMPACT DESIGN

SORCERER MINI

SPELL IT



GASKET MOUNT DESIGN
TRIPLE-LAYERED DAMPENING FOAM

XPG RED SWITCH
SMOOTH TYPING EXPERIENCE

65% FORM FACTOR
ULTRA PORTABLE



XPG PRIME SOFTWARE

Enjoy unlimited RGB customization and synchronized lighting across all of your compatible XPG peripherals, components, and memory modules.

<https://prime.xpg.com/>



Headquarters

ADATA Technology Co., Ltd.
Taipei
T: +886-2-8228-0886
E: adata@adata.com

Asia

Beijing, China
T: +86-10-8289-9532
E: adata_bj@adata.com

Hong Kong, China
T: +852-2127-7072
E: adata_hk@adata.com

Shanghai, China
T: +86-21-6233-1010
E: adata_sh@adata.com

Tokyo, Japan
T: +81-3-5807-0011
E: adata_jp@adata.com
E: IASales_jp@adata.com

Shenzhen, China
T: +86-755-8882-3637
E: adata_sz@adata.com

Delhi, India
T: +91-11-44731886
E: adata_delhi@adata.com

Manufacturing Facilities

Suzhou, China
T: +86-512-6593-0886
E: adata@adata.com

São Paulo, Brazil
T: +55-19-3199-0886
E: adata_br@adata.com

Manaus, Brazil
T: +55-92-2125-9090
E: adata_br@adata.com



WWW.XPG.COM

Copyright 2025 by ADATA Technology Co., Ltd. All rights reserved.
All brand names are registered trademarks of their respective owners.

Americas

Los Angeles, USA
T: +1-714-332-8708
E: adata_usa@adata.com
E: IASales_us@adata.com

Mexico City, Mexico
T: +52-55-5543-7427
E: mexico@adata.com

Miami, USA
T: +1-786-536-2128
E: adata_latin@adata.com

Santo Antonio de Posse, Brazil
T: +55-19-3199-0886
E: adata_br@adata.com

Europe

Hoofddorp, Netherlands
T: +31-23-5689203
E: adata_europe@adata.com

Munich, Germany
T: +49-899-0405-296
E: IASales_eu@adata.com

Cologne, Germany
T: +49-221-65-080-4093
E: adata_europe@adata.com